

FIG.1A

FIG.1C

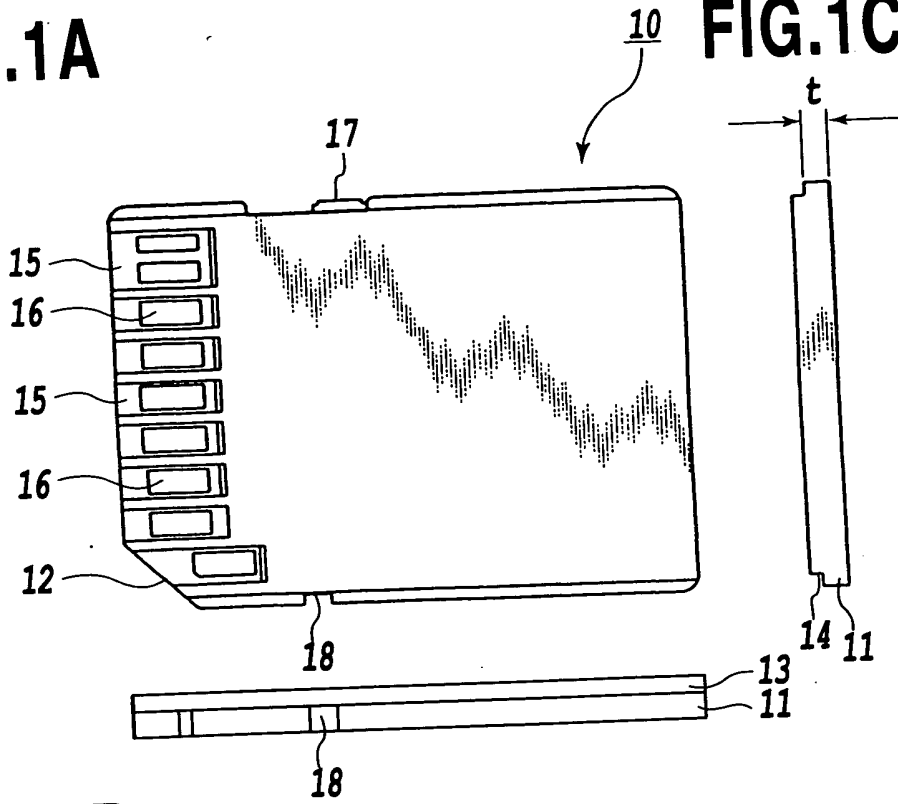


FIG.1B

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

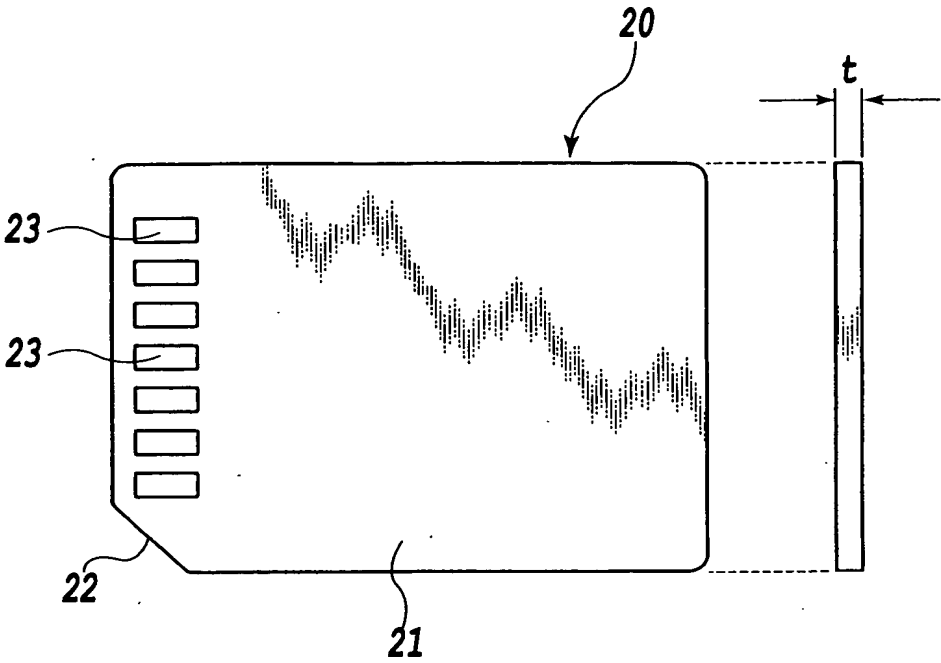


FIG.2A

FIG.2B

FIG. 4 is a cross-sectional view of the device of FIG. 1, taken along line 4-4 of FIG. 1, showing the internal components and the electrical connections between the device and the external circuitry.

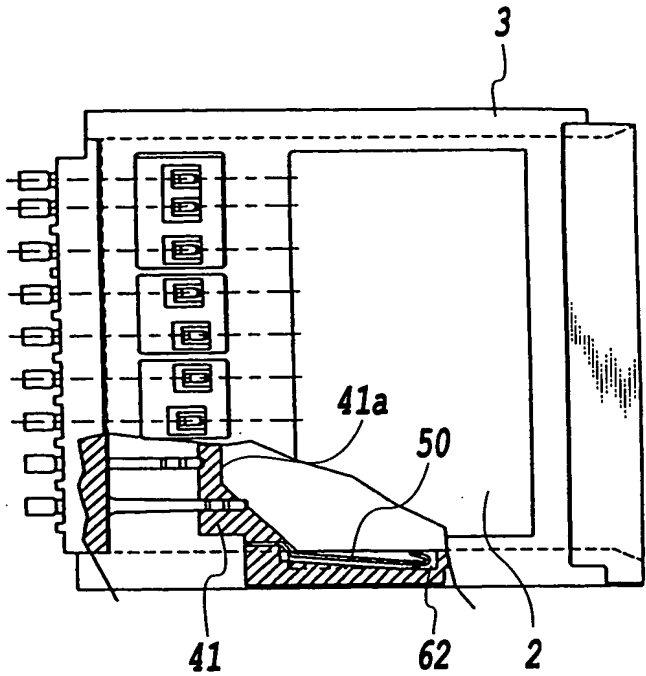


FIG.4

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

5/39

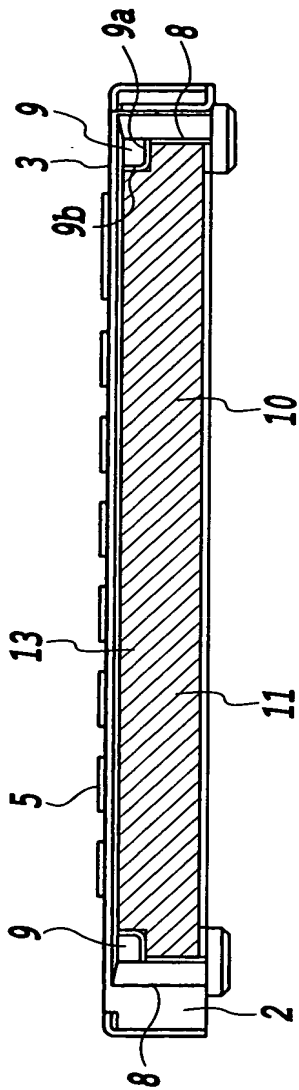


FIG.5

6/39

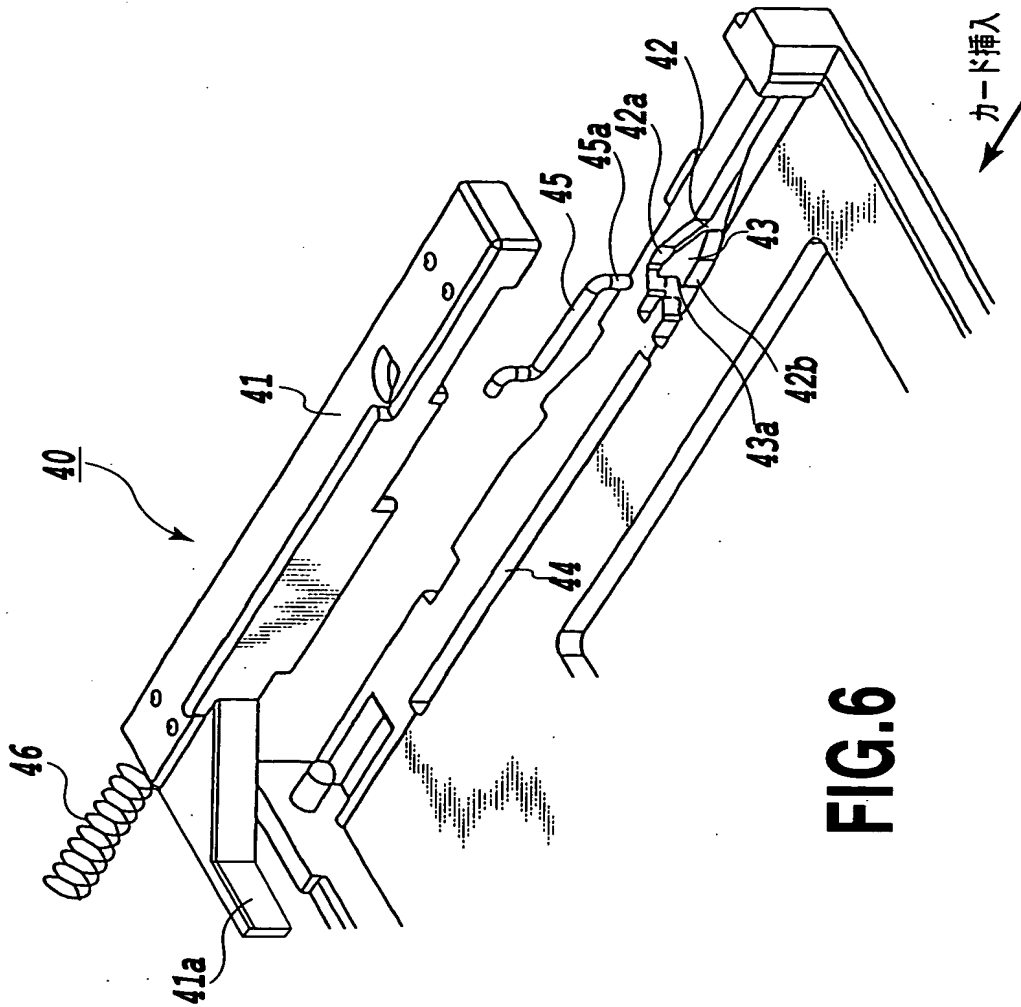


FIG. 6

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

7/39

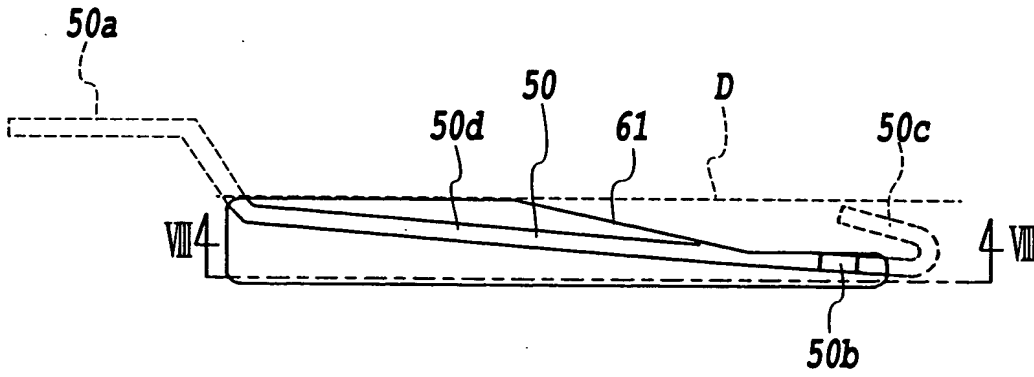


FIG.7

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

8/39

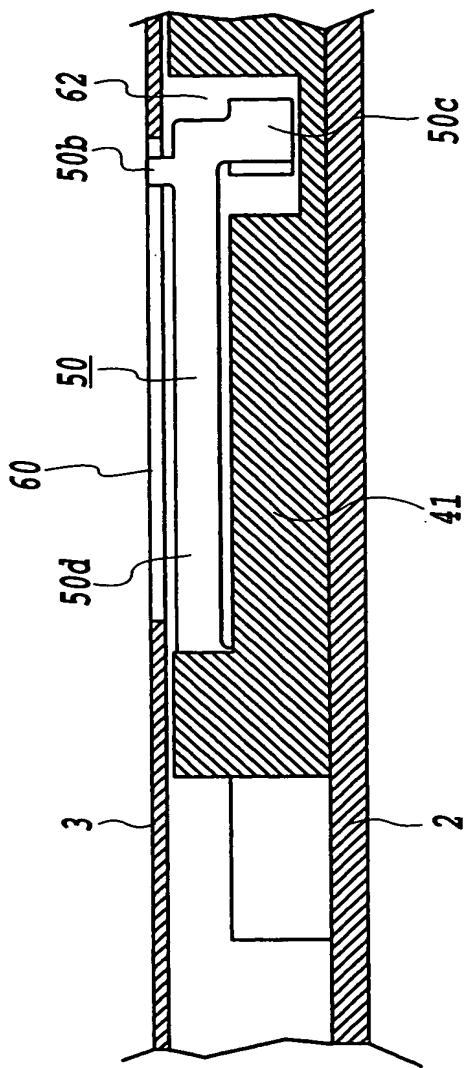


FIG.8

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

9/39

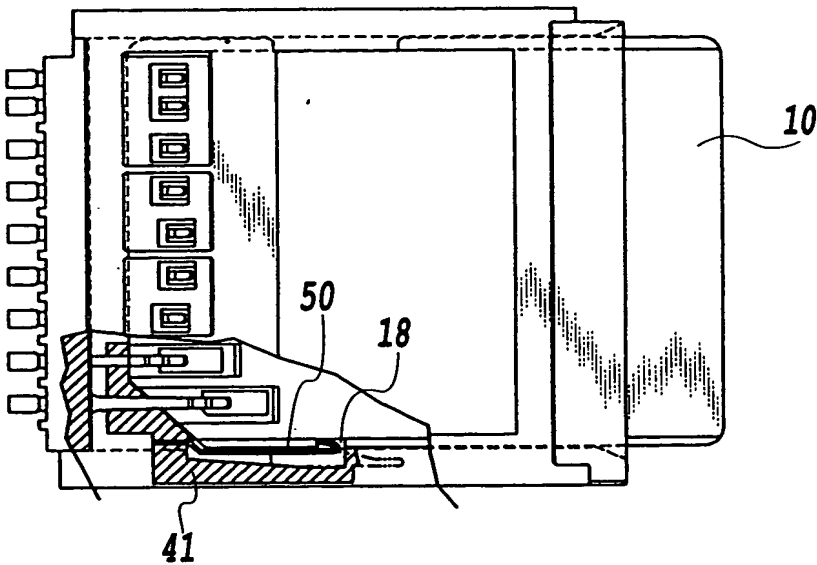


FIG.9

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

10/39

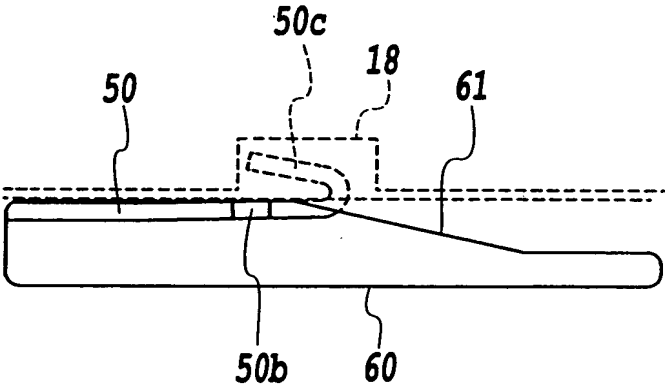


FIG.10

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

11/39

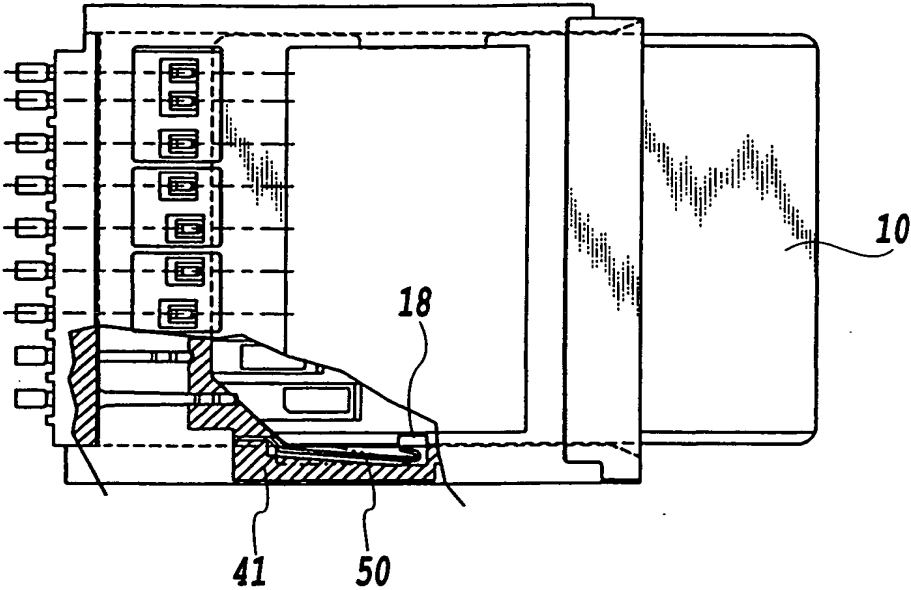


FIG.11

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

12/39

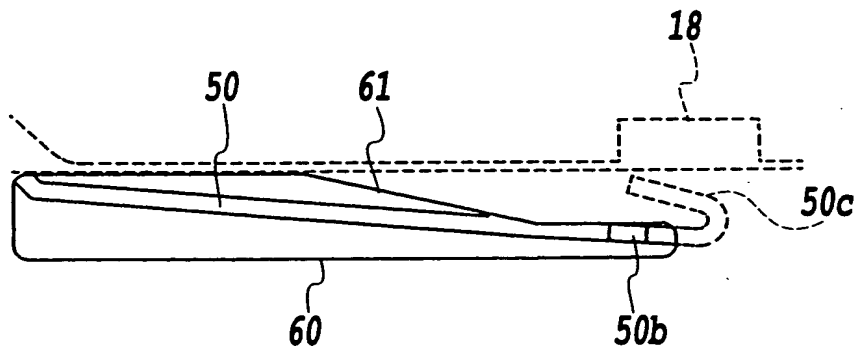


FIG.12

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

13/39

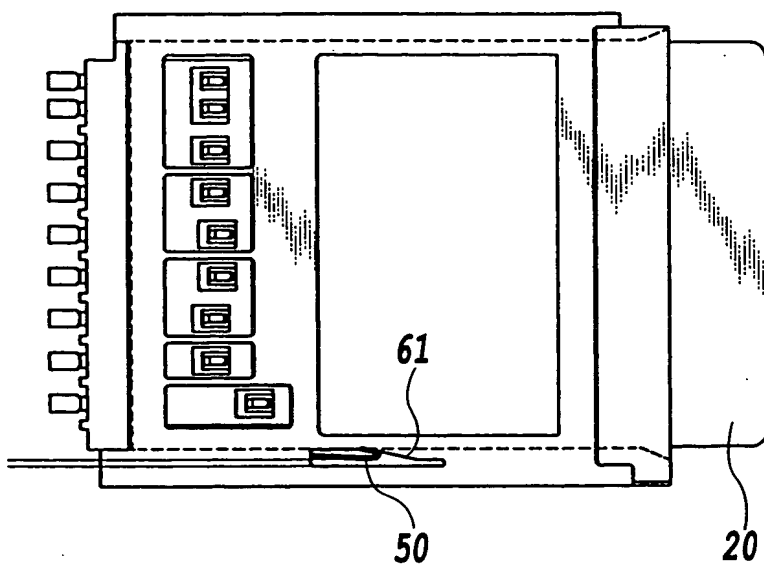


FIG.13

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

14/39

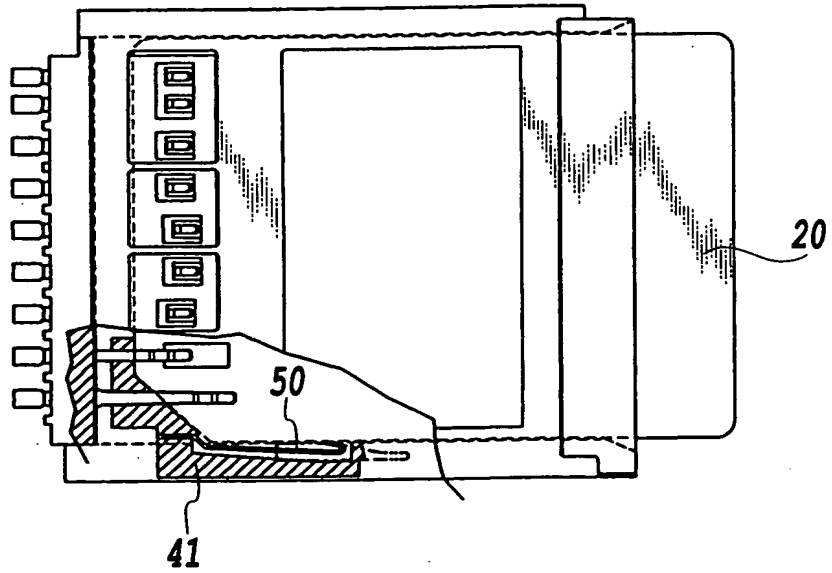


FIG.14

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

15/39

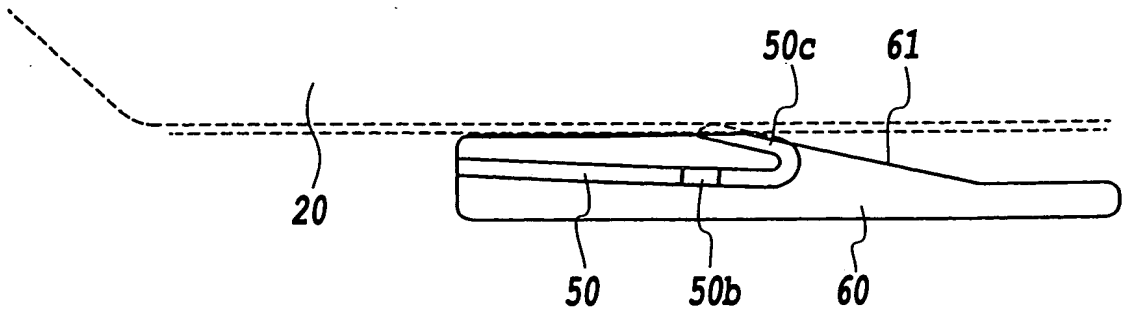


FIG.15

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

16/39

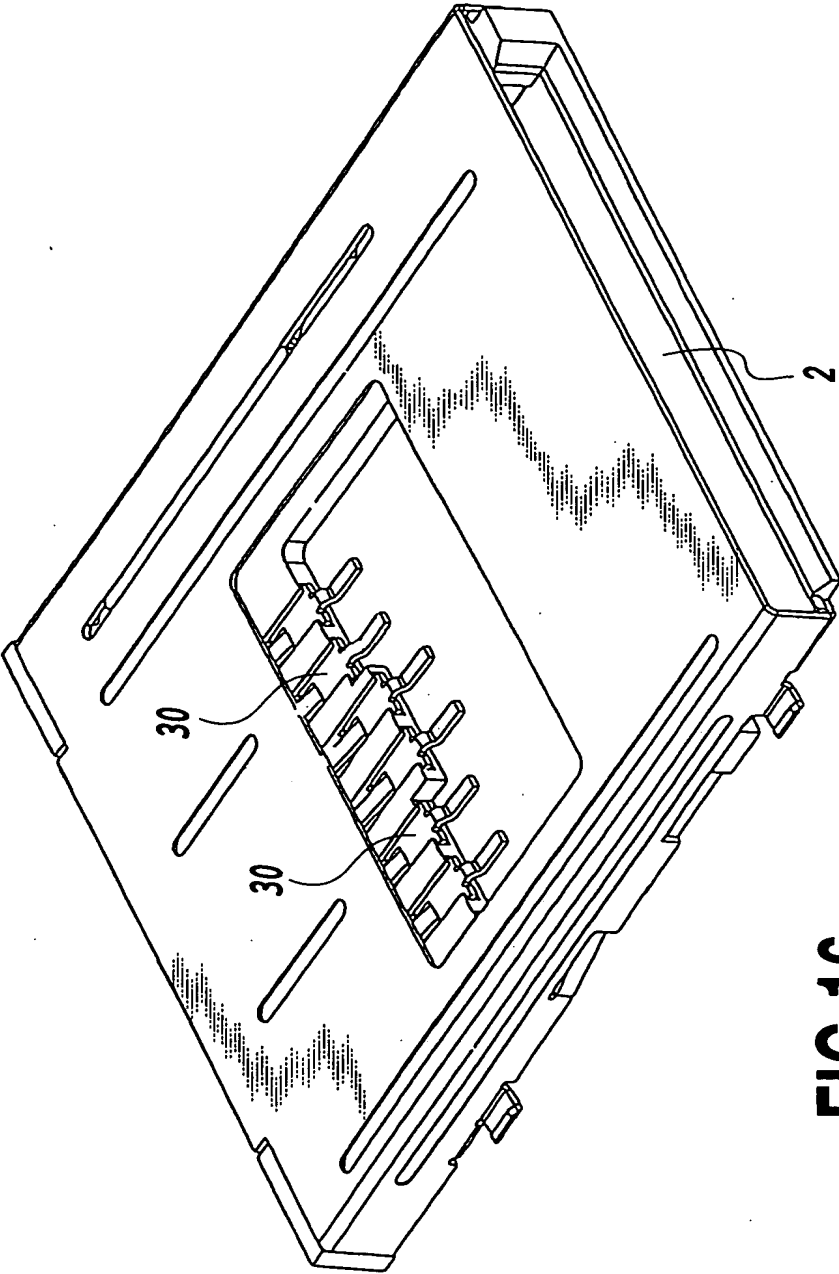


FIG.16

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

18/39

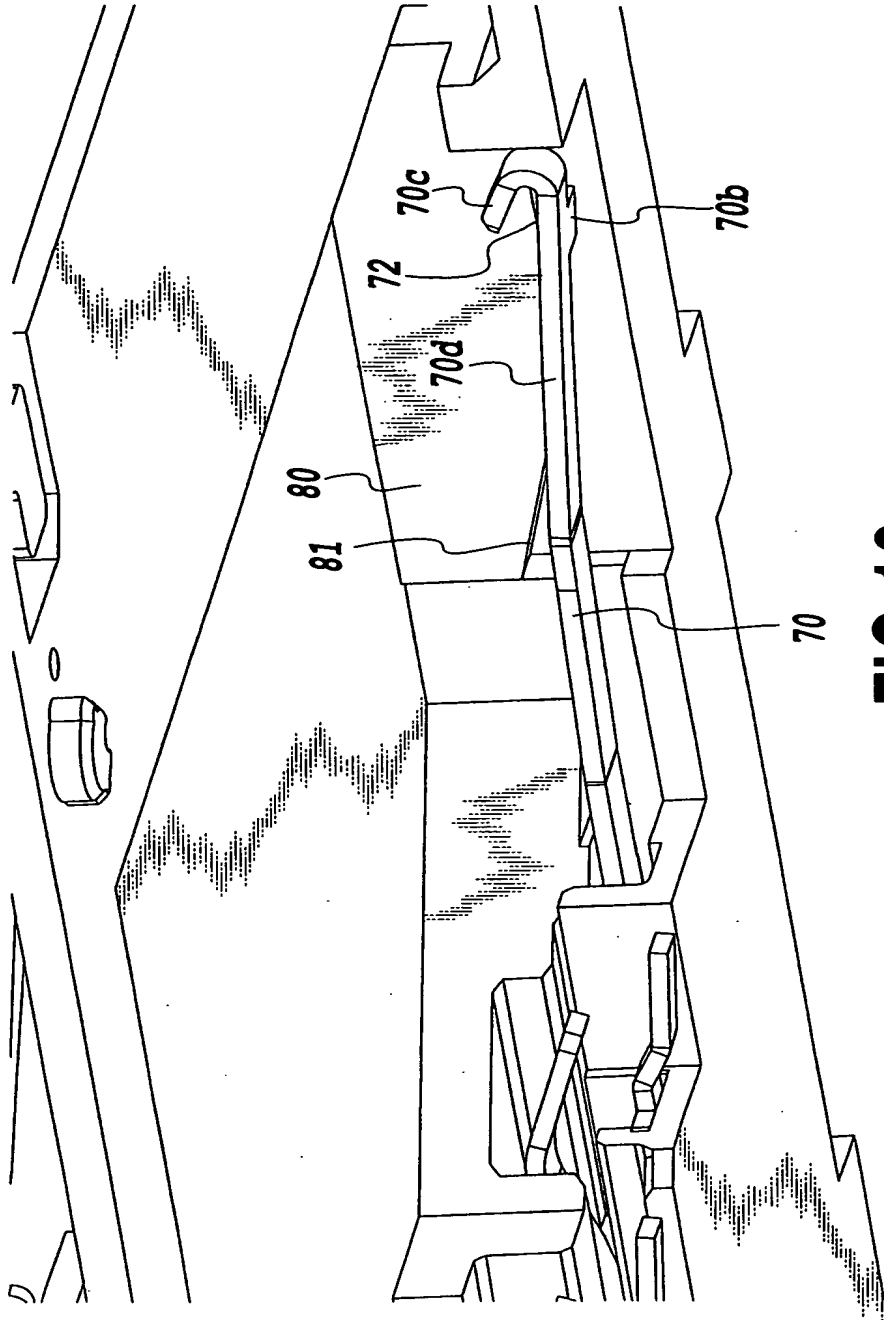


FIG. 18

19/39

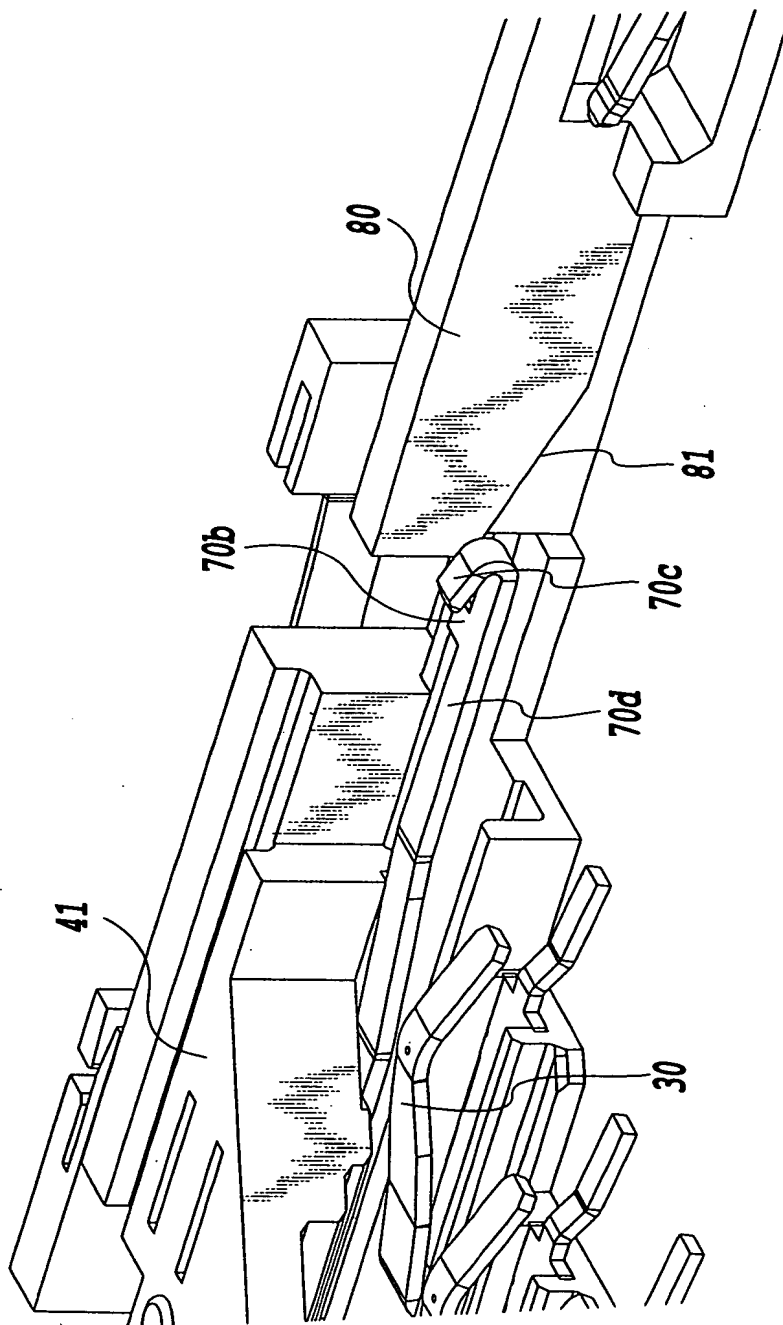


FIG.19

20/39

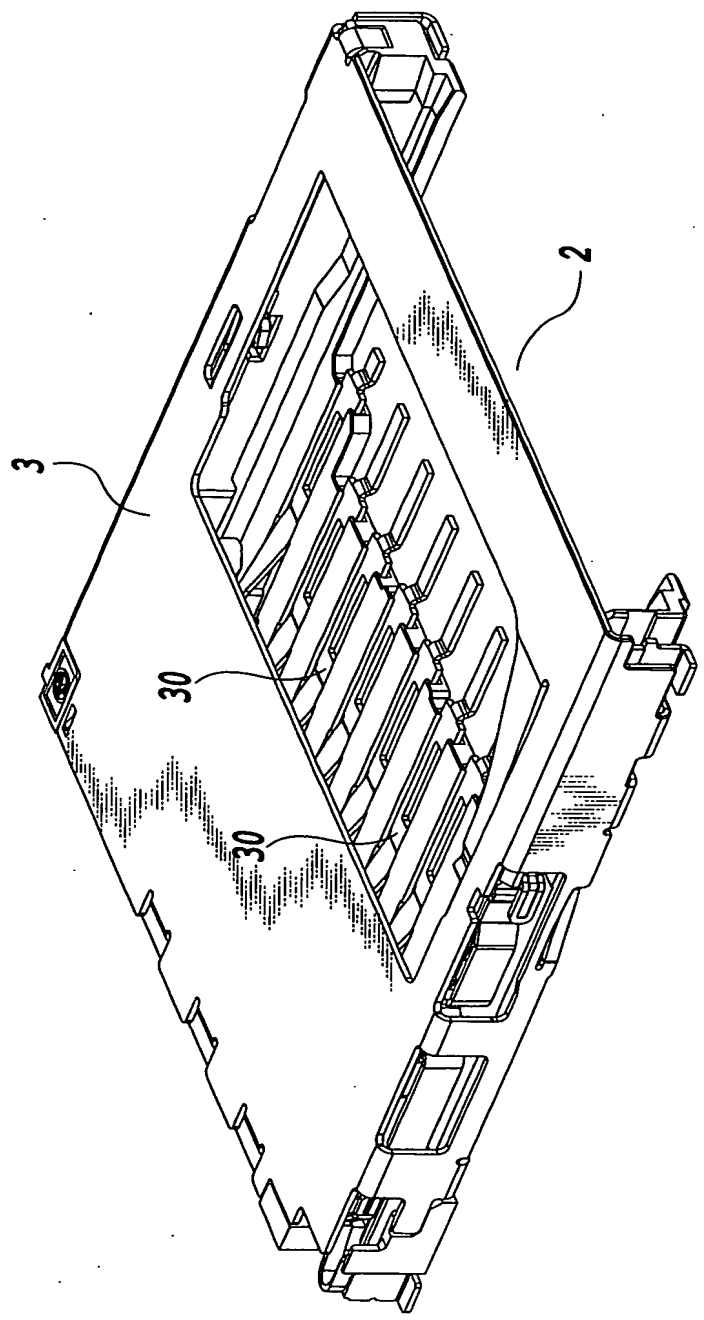


FIG.20

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

21/39

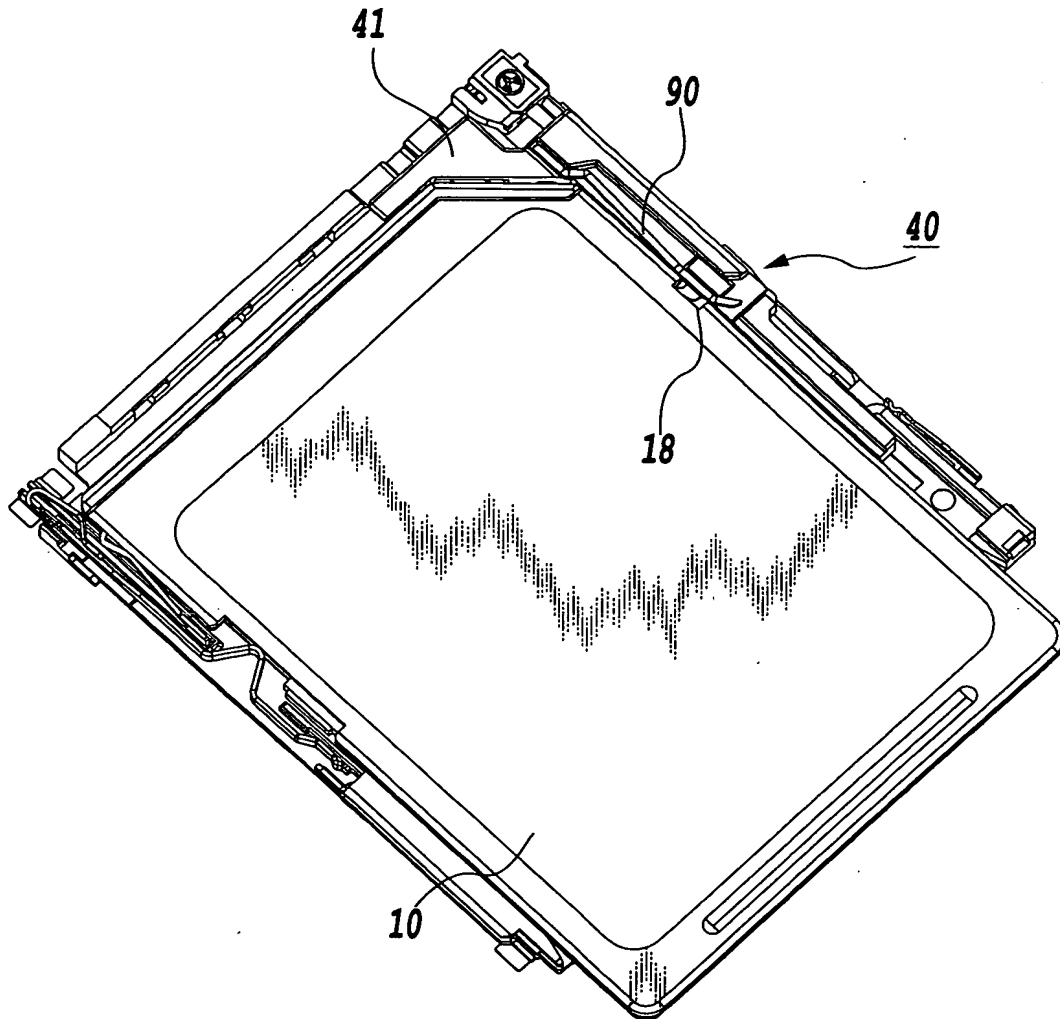


FIG.21

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

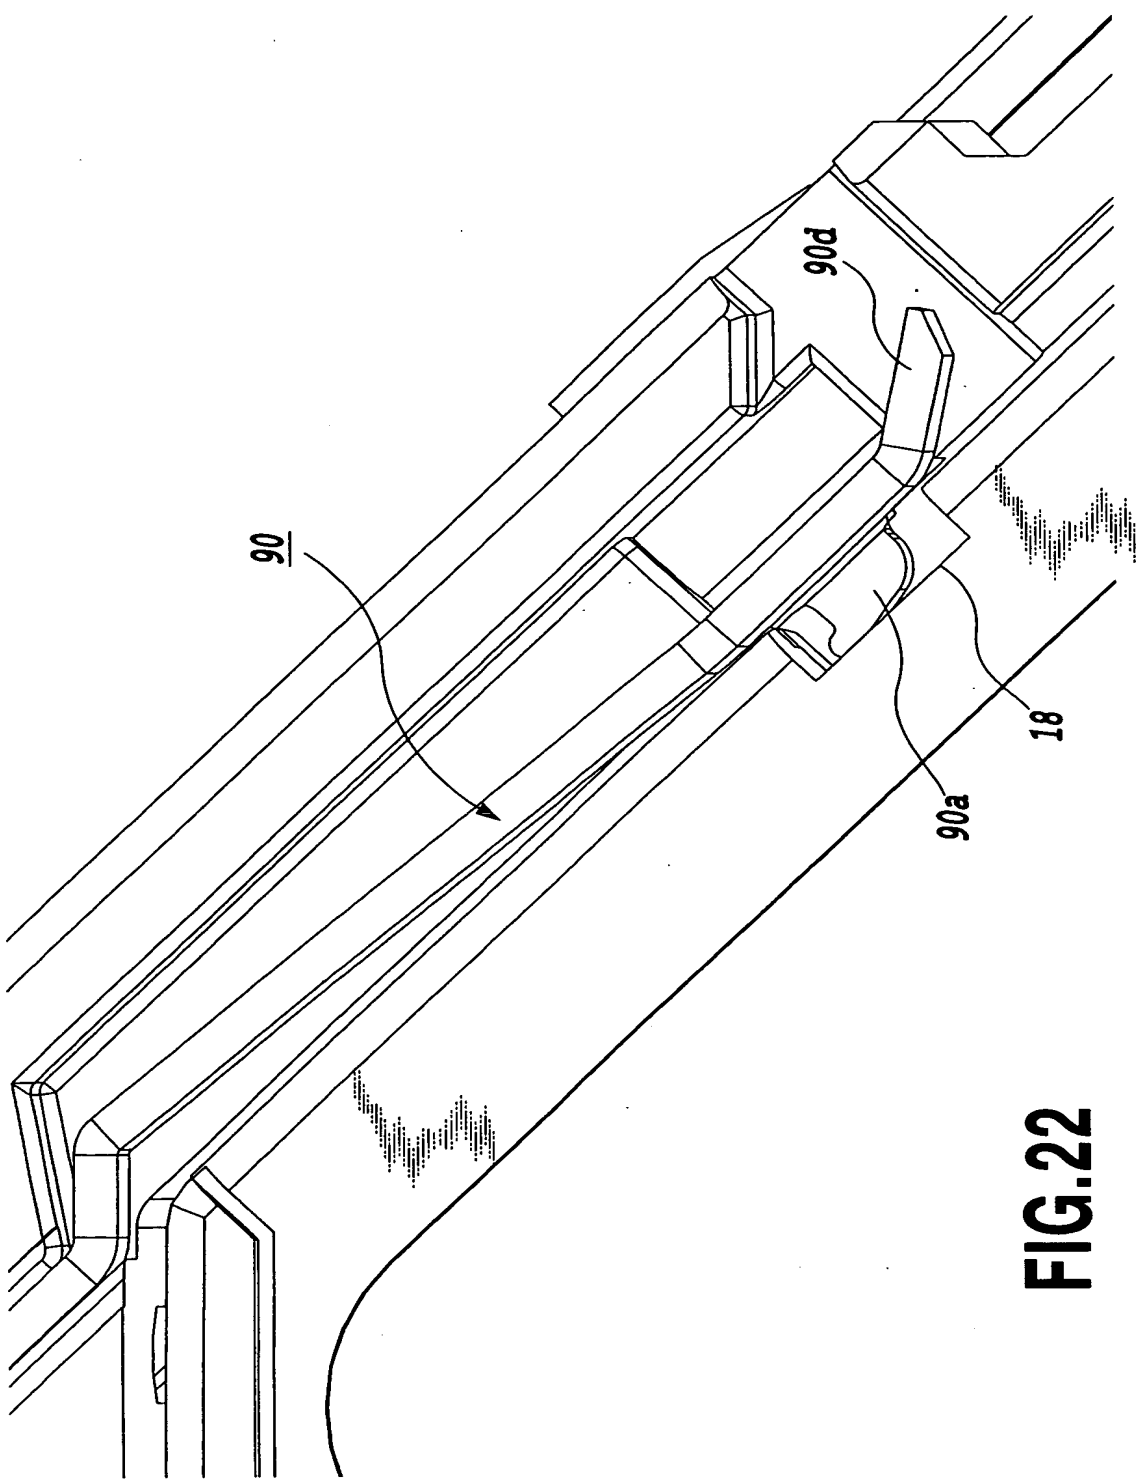


FIG.22


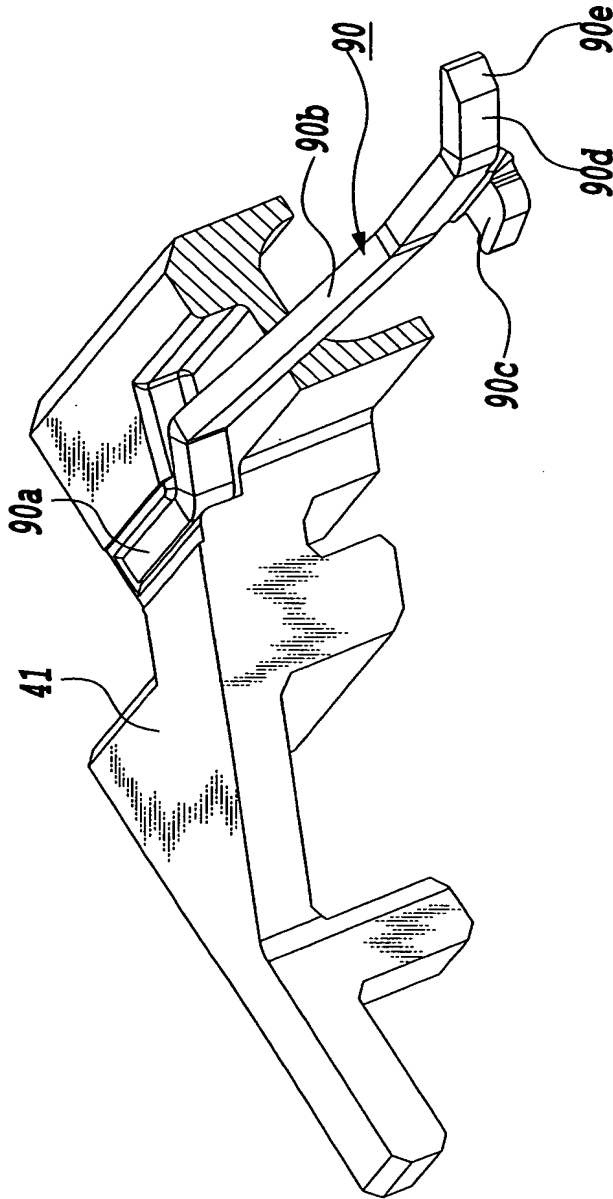


FIG. 23

24/39

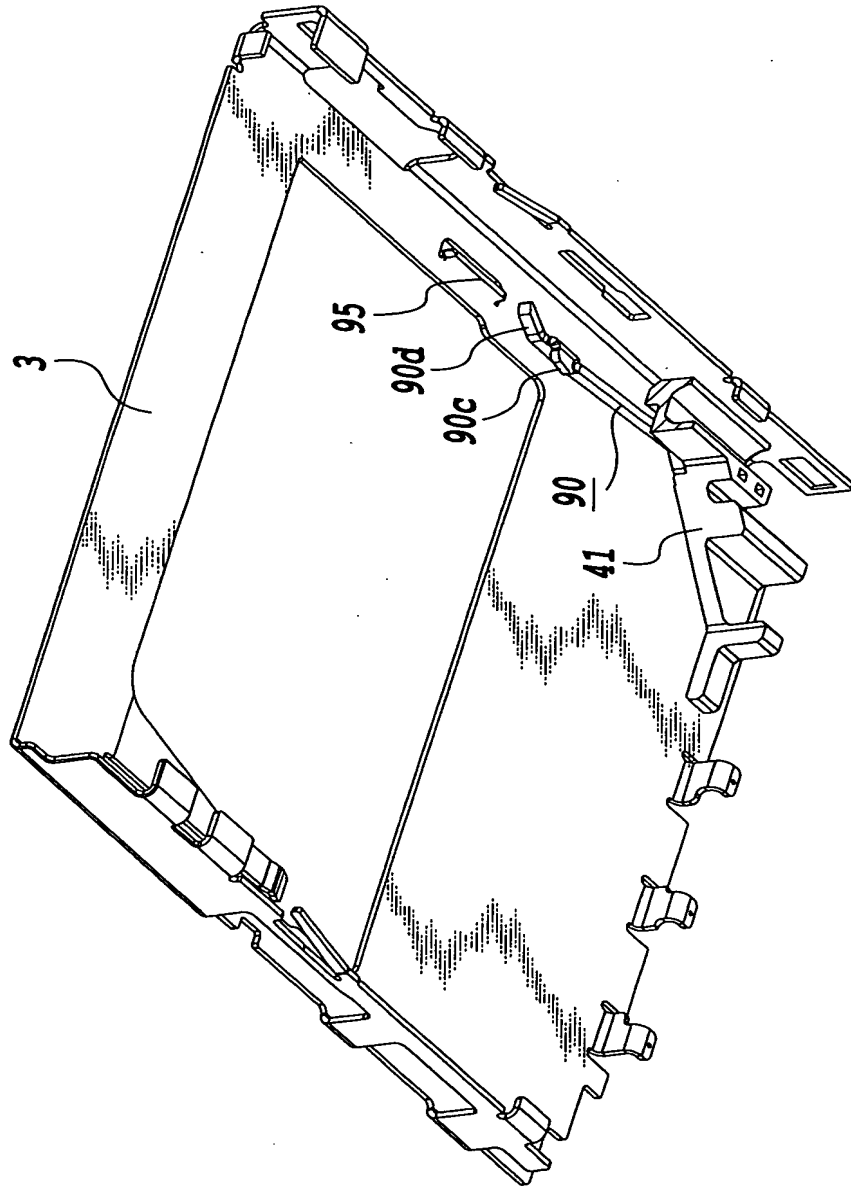

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

25/39

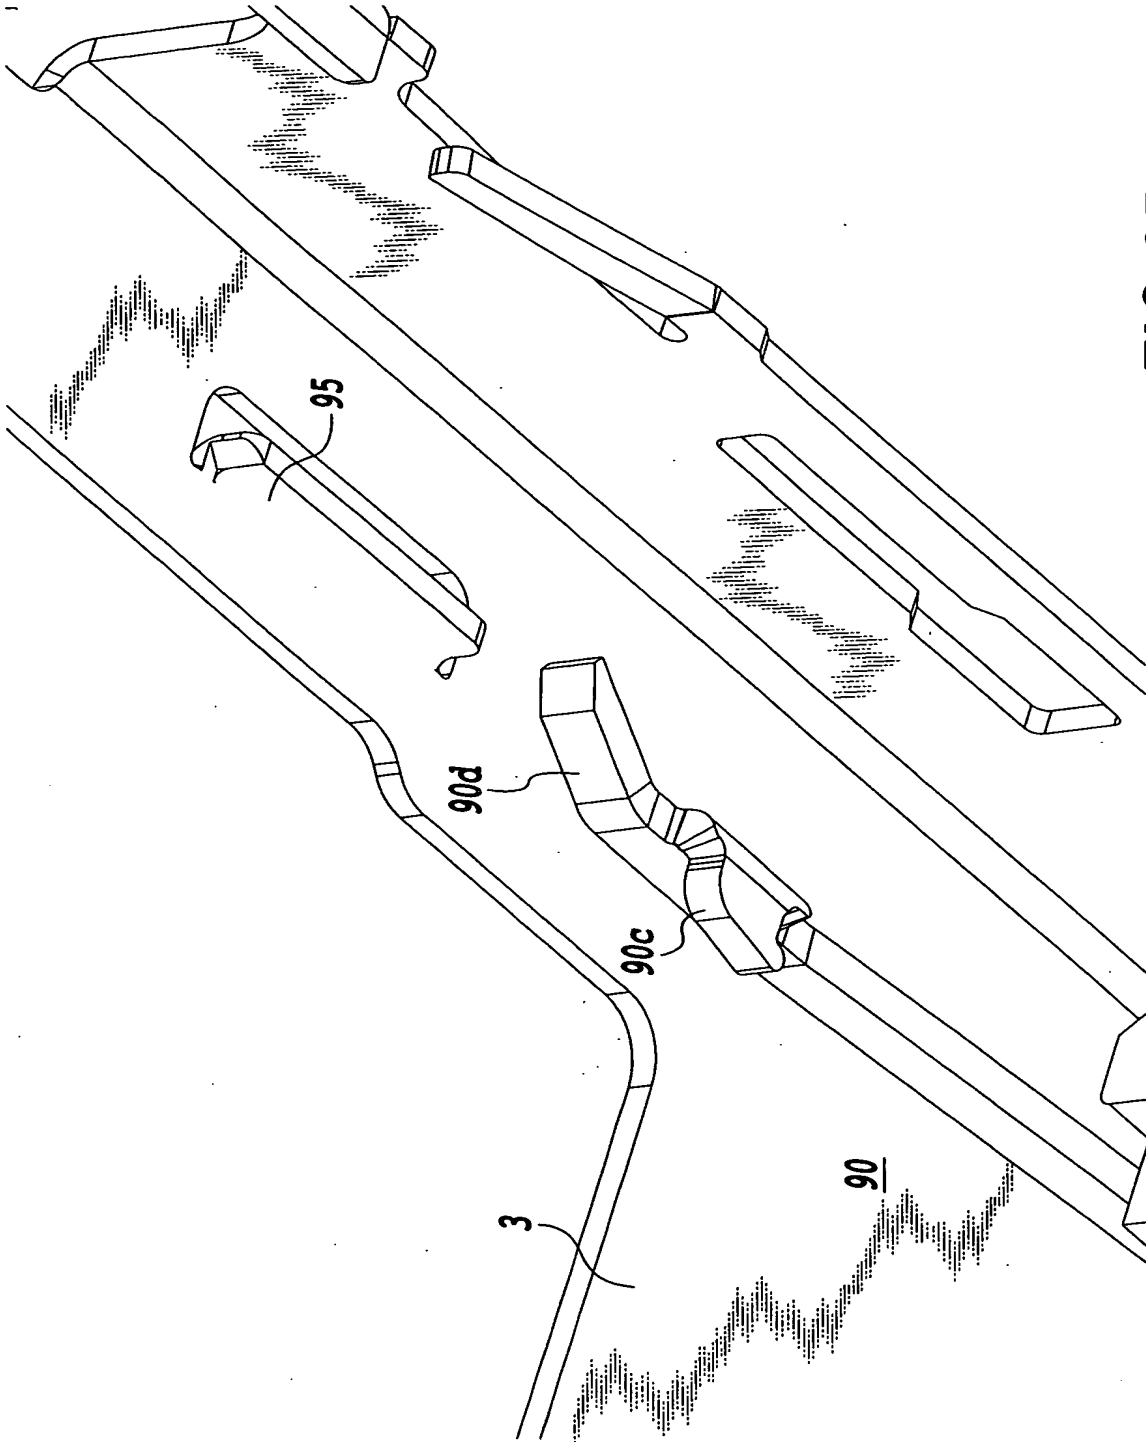


FIG.25

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

26/39

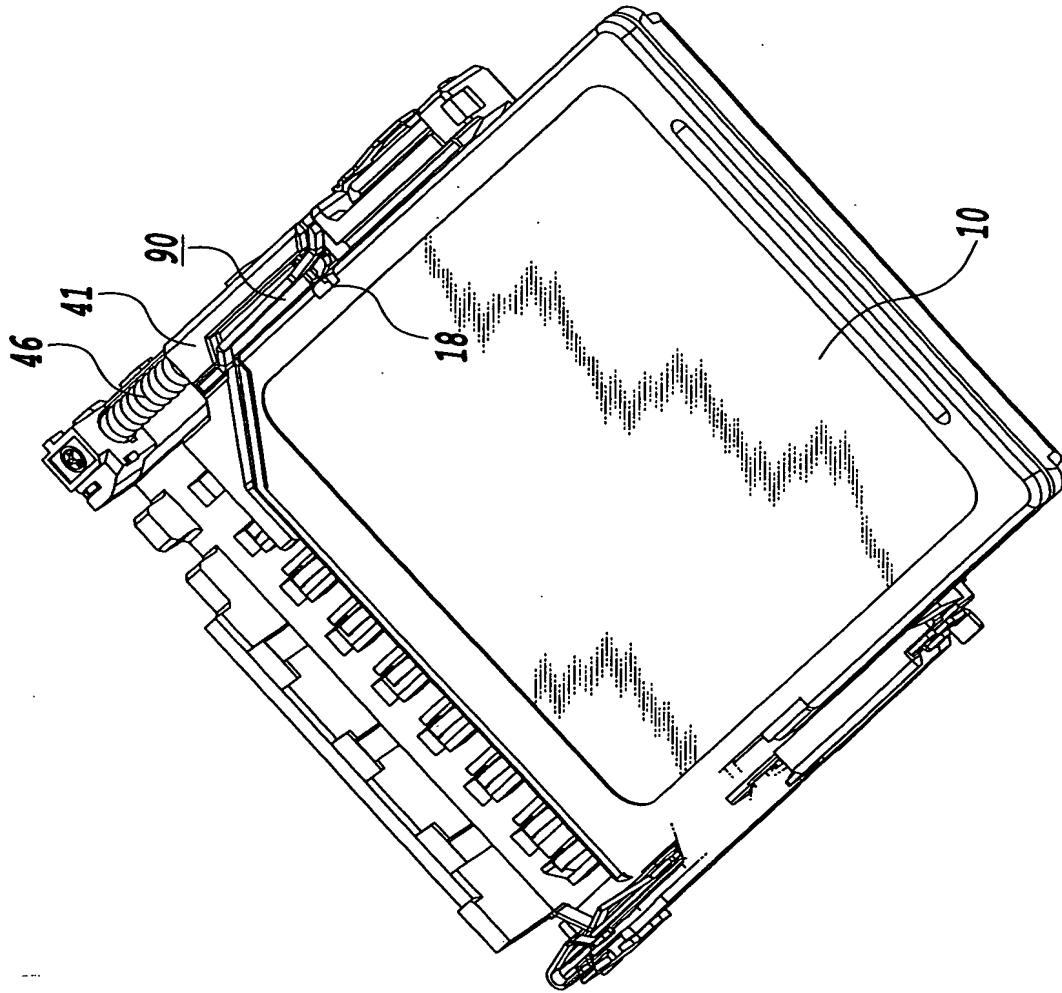


FIG. 26

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

27/39

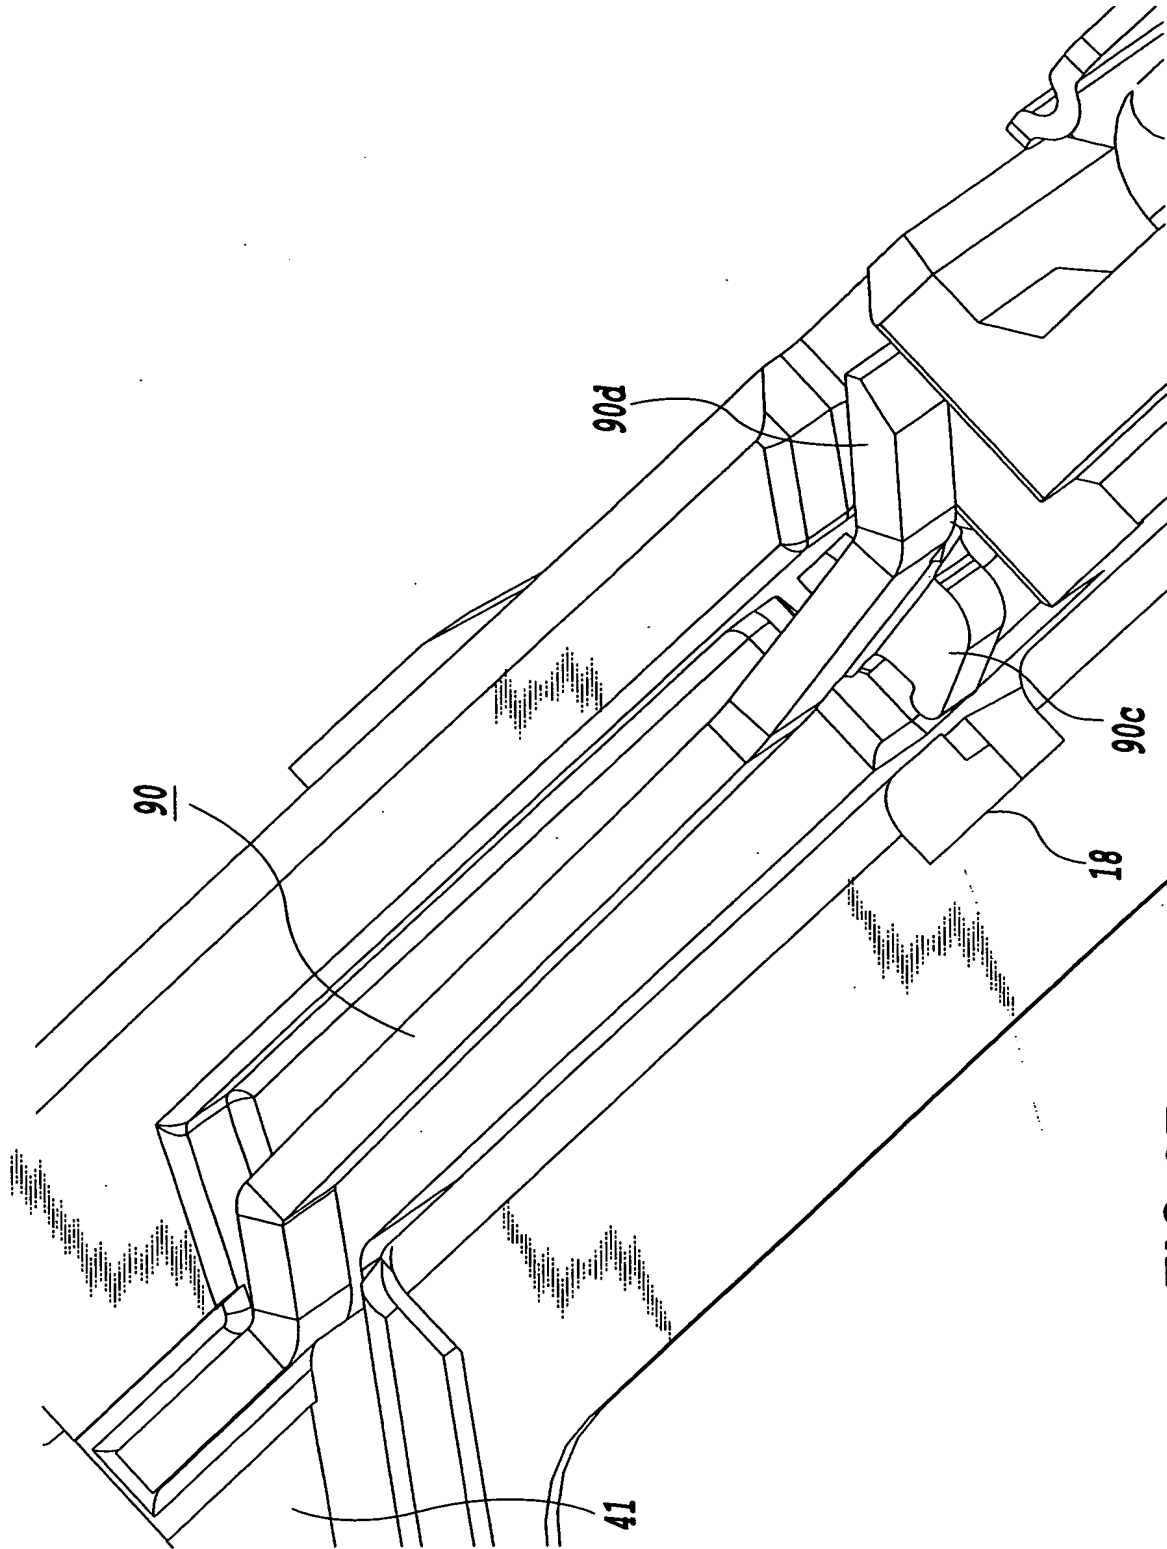


FIG. 27

BY	CLASS	SUBCLASS
DRAFTSMAN		

28/39

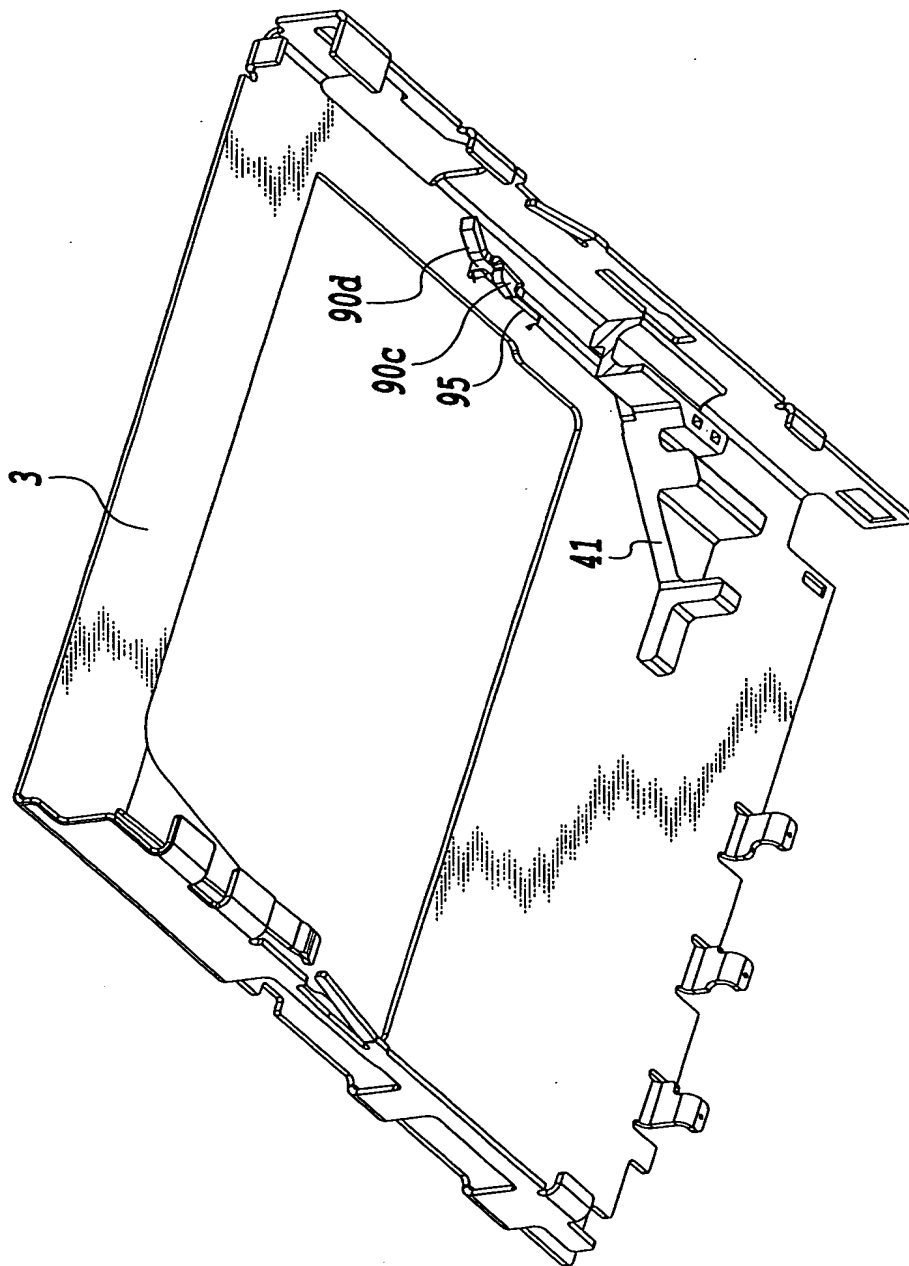


FIG.28

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

29/39

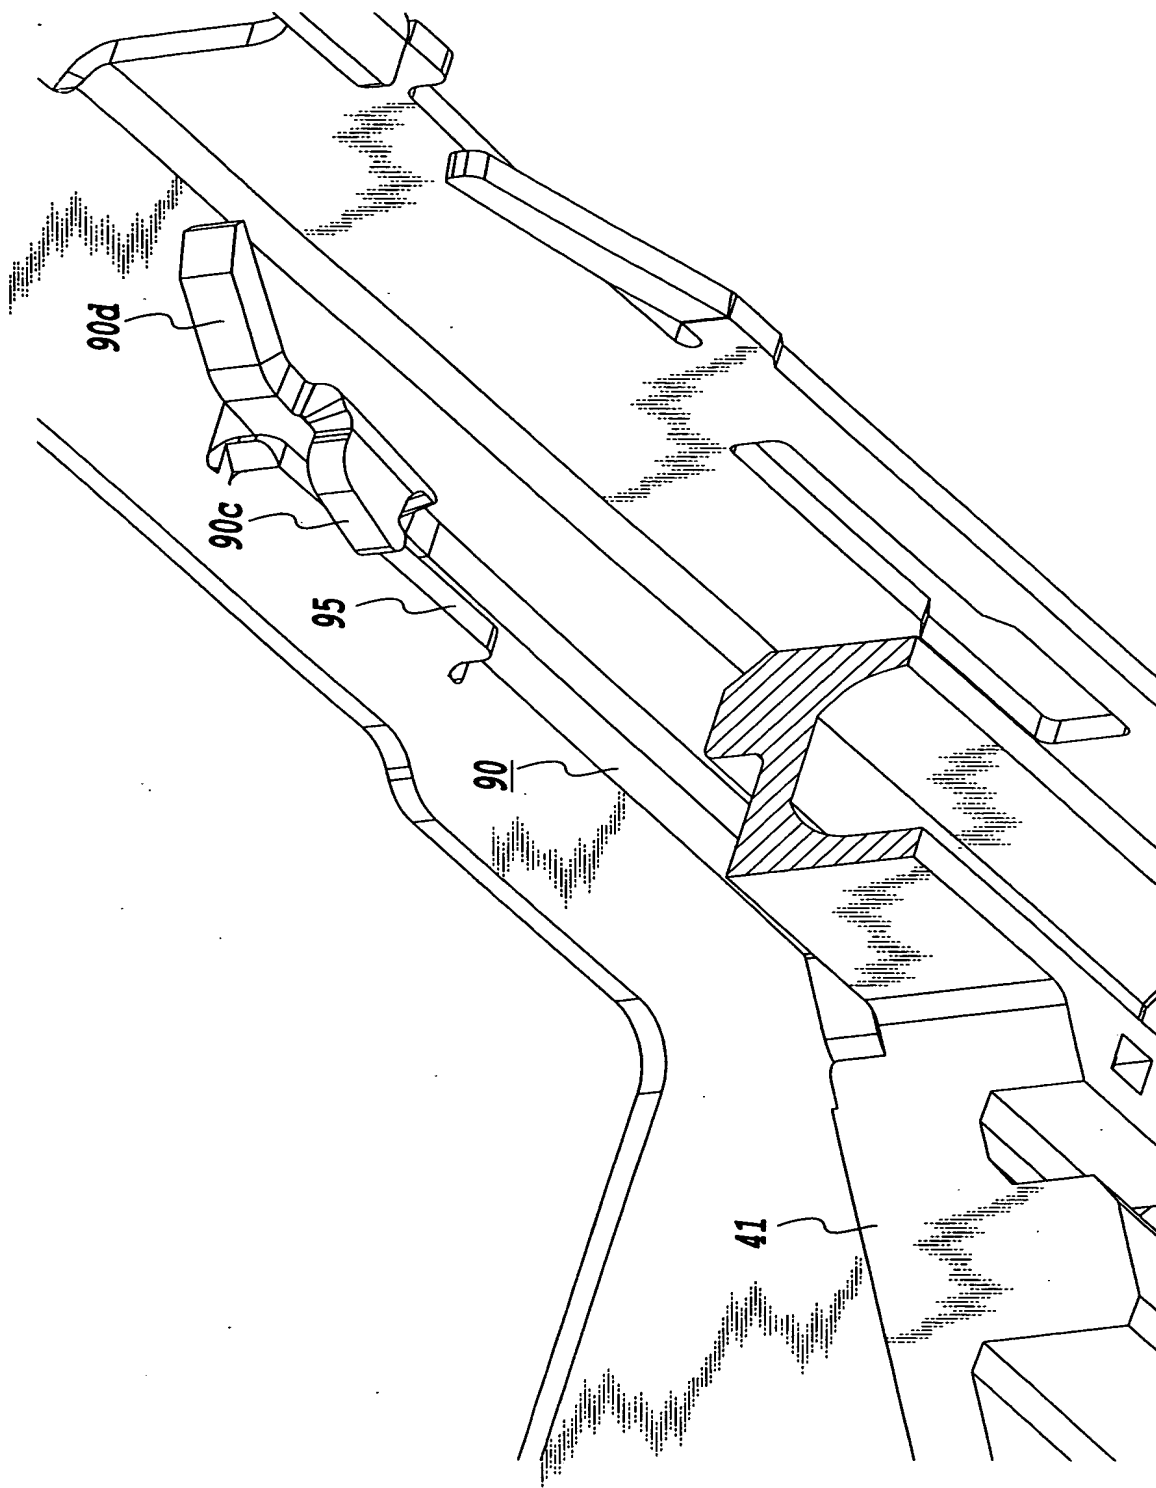


FIG. 29

FIG. 29 is a perspective view of a mechanical assembly, showing a frame structure with various components labeled 41, 90, 95, 90c, and 90d. The drawing uses solid lines to represent the edges of the components and hatching to indicate hidden surfaces or internal features.

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

30/39

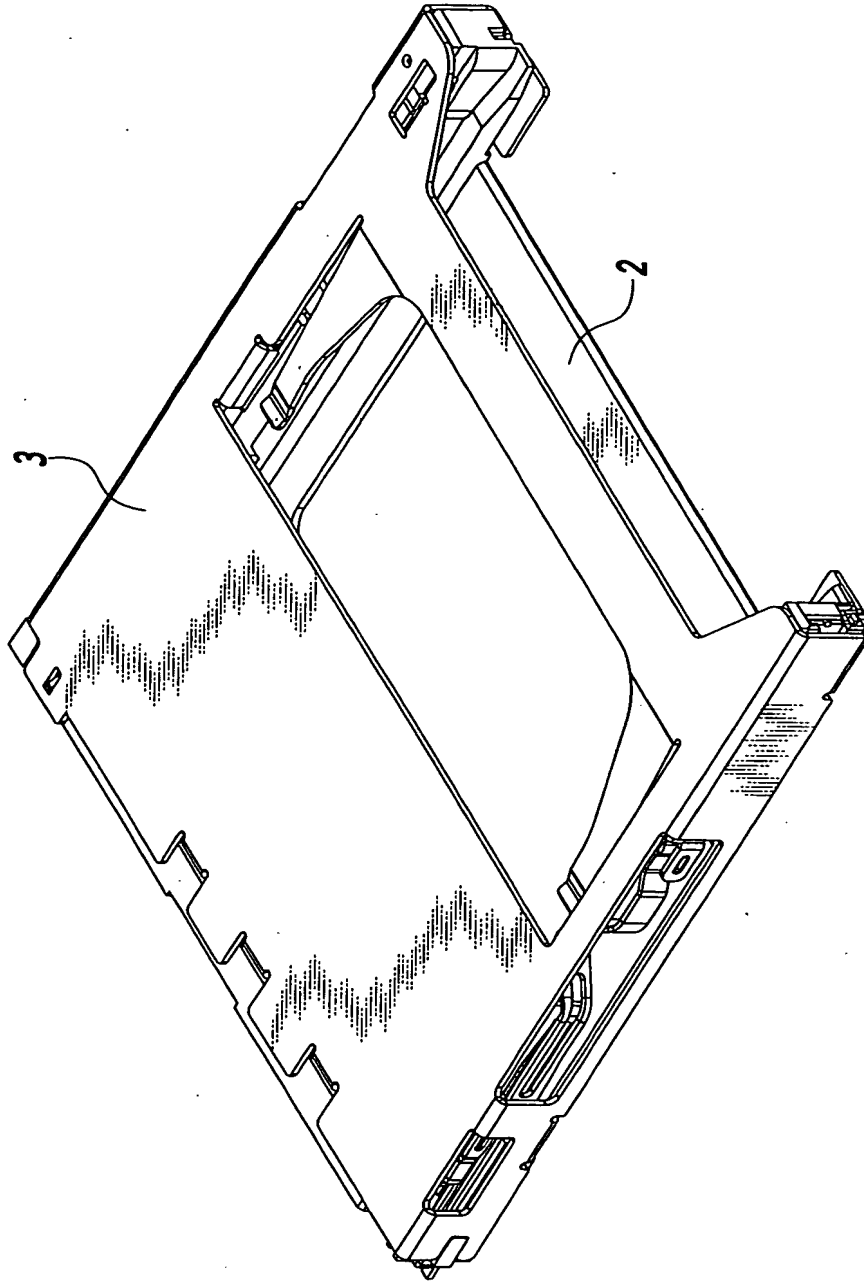


FIG.30

31/39

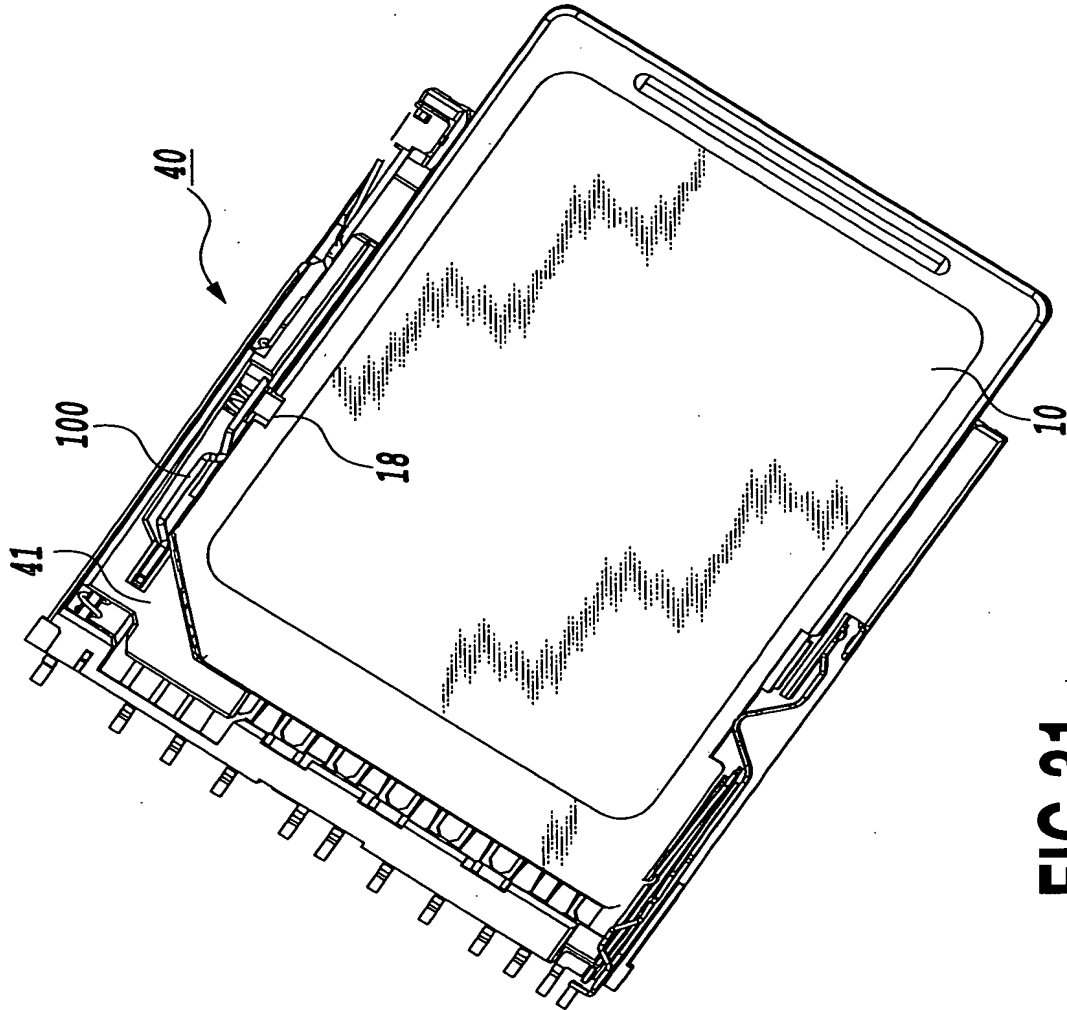


FIG.31

FIG. 31 is a perspective view of the device 10 showing the display area 18, the top bezel 40, the pins 41, and the component 100.

32/39

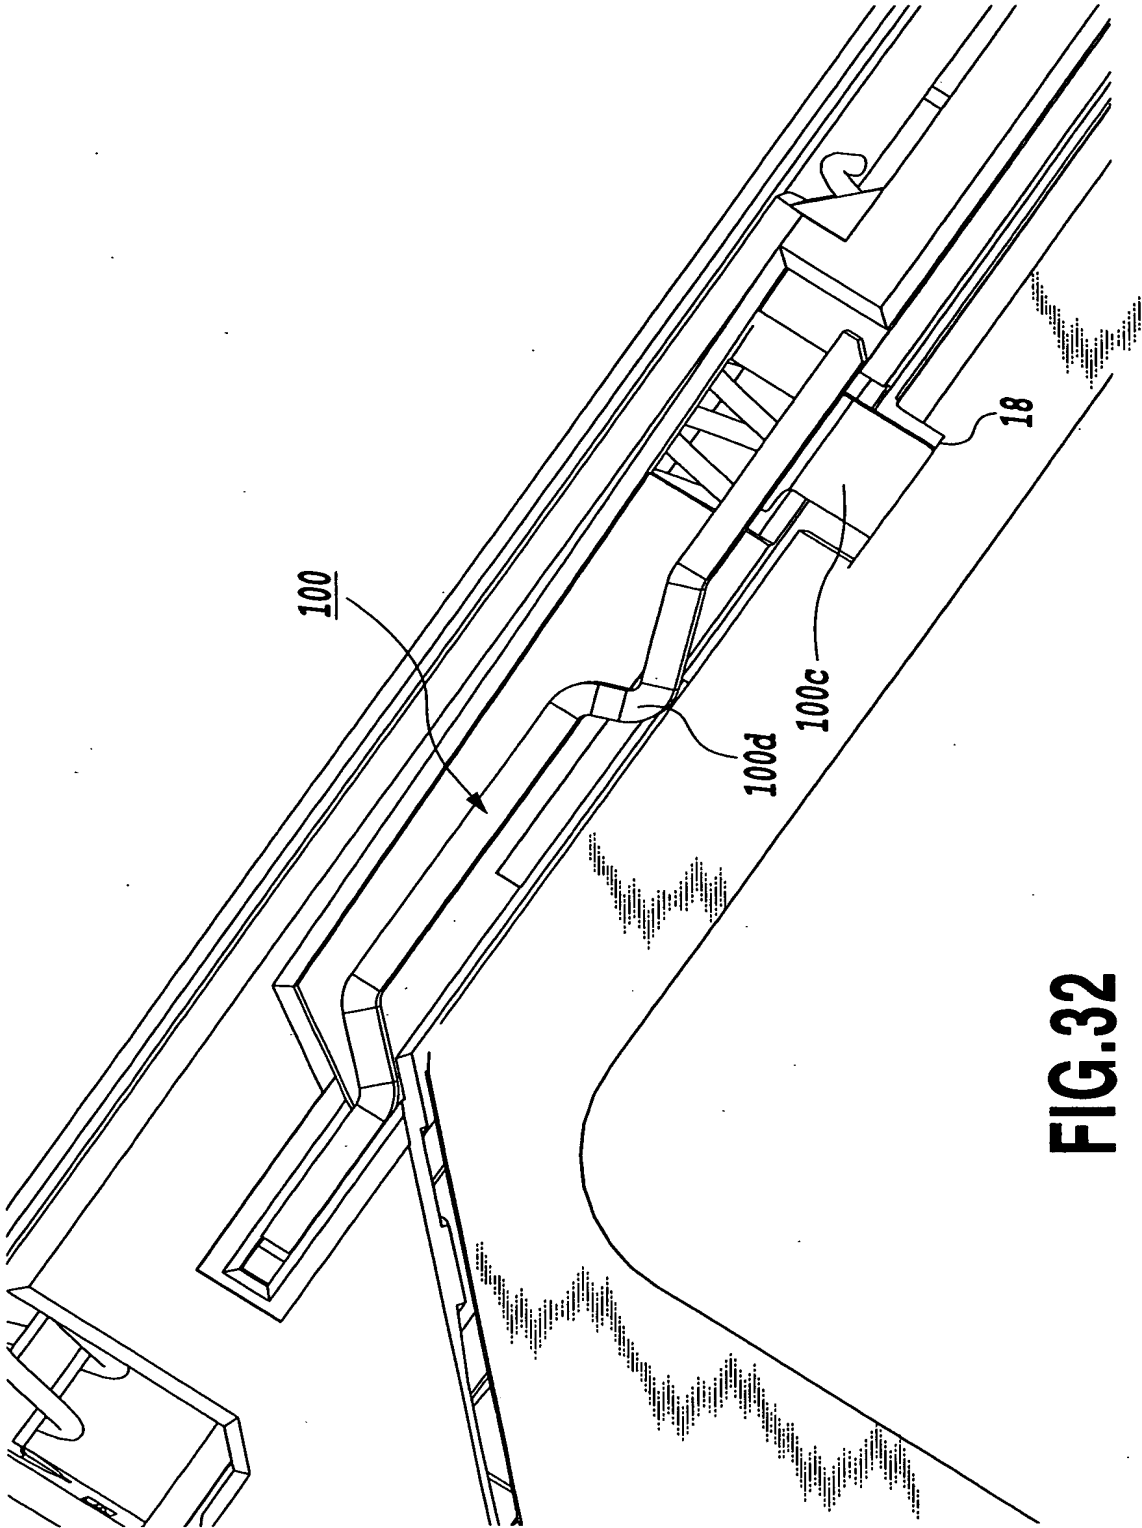


FIG. 32

33/39

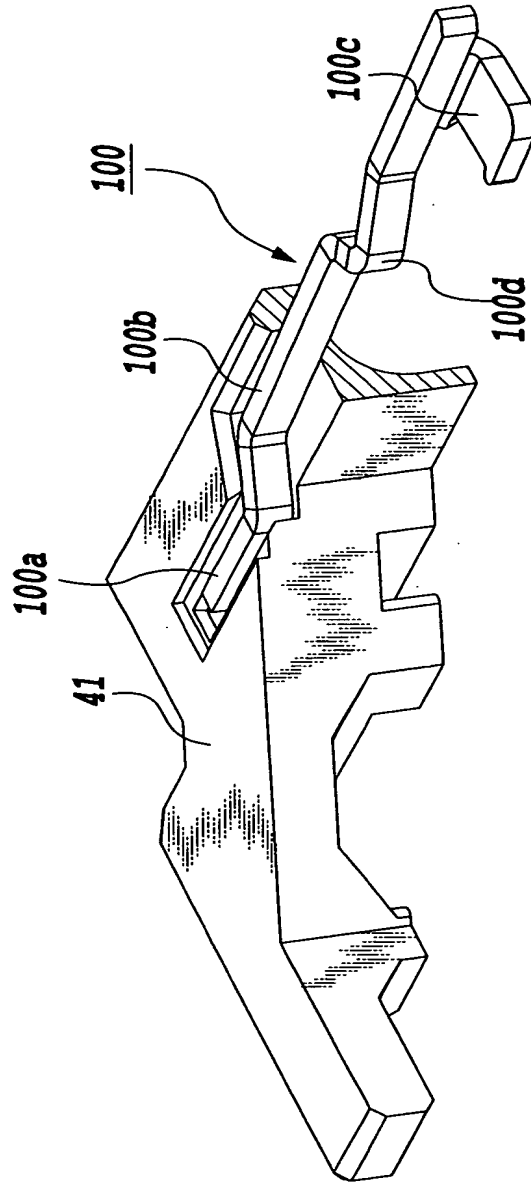


FIG. 33

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

34/39

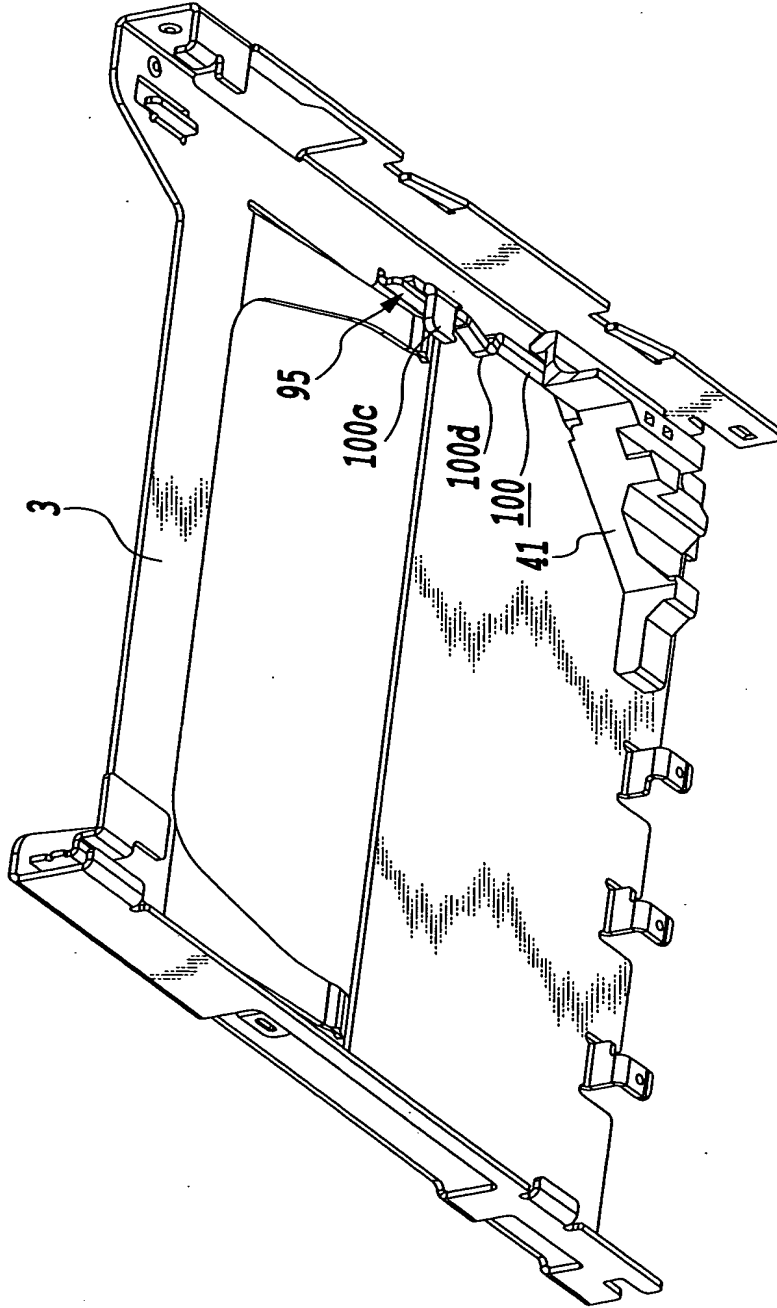


FIG.34

FIG.35

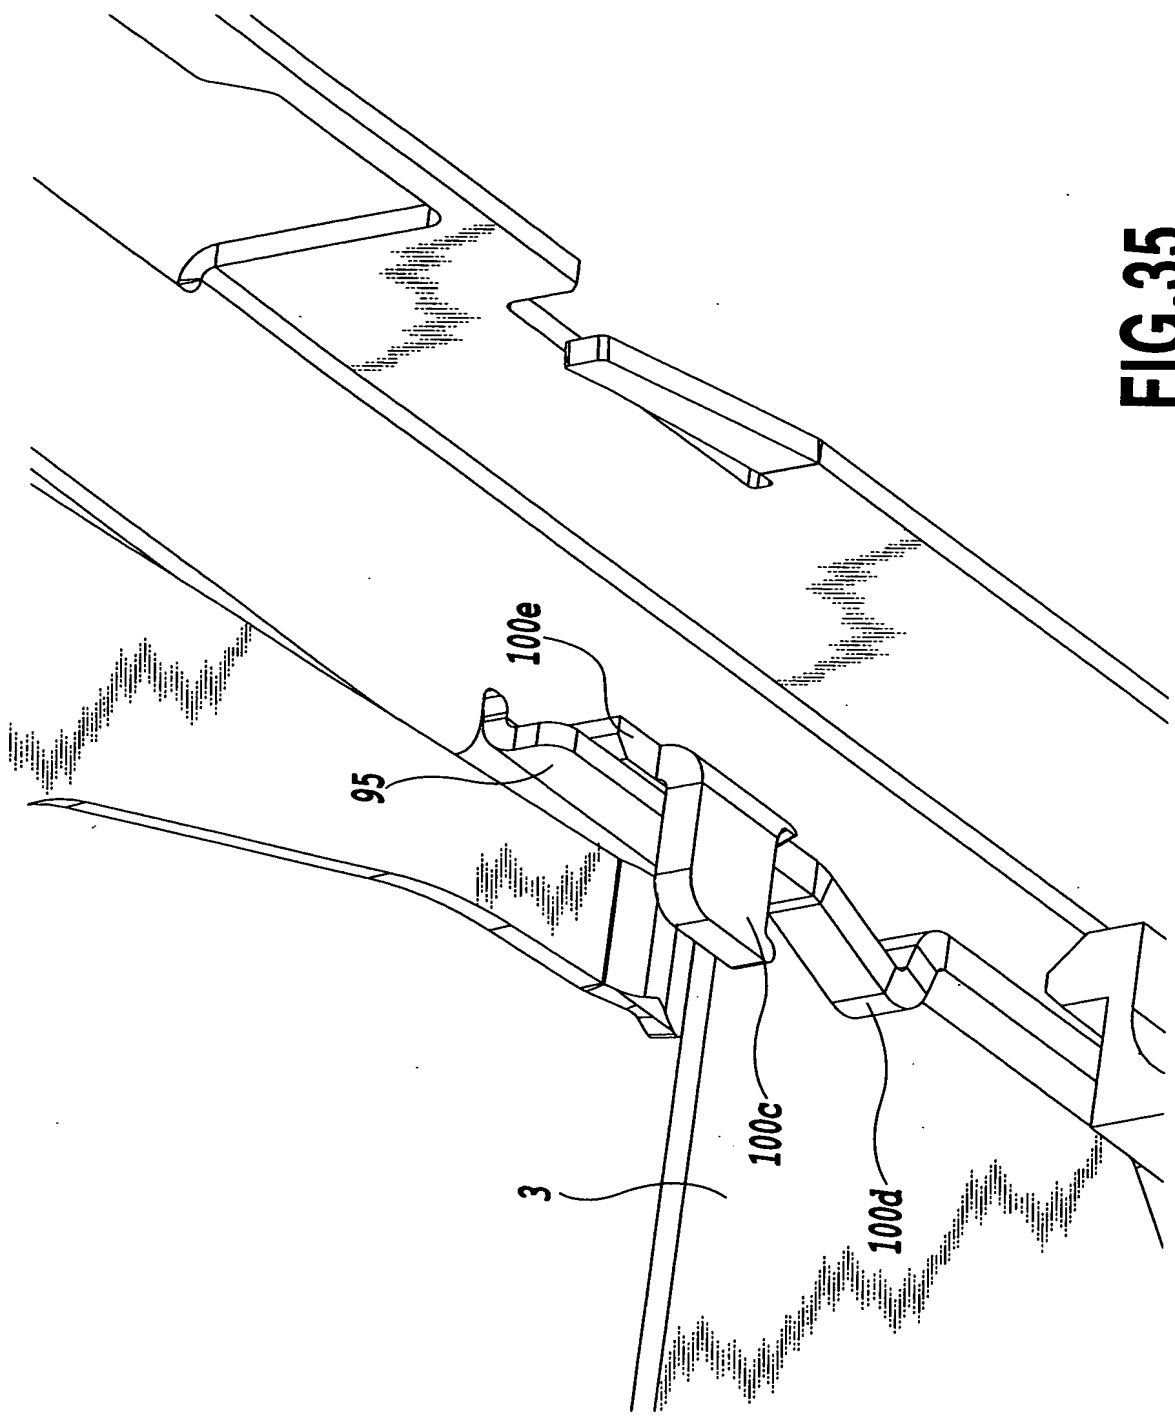


FIG. 35 is a perspective view of the hinge assembly 100, showing the hinge body 95, the hinge pin 100c, the hinge pin 100d, and the hinge pin 100e.

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

36/39

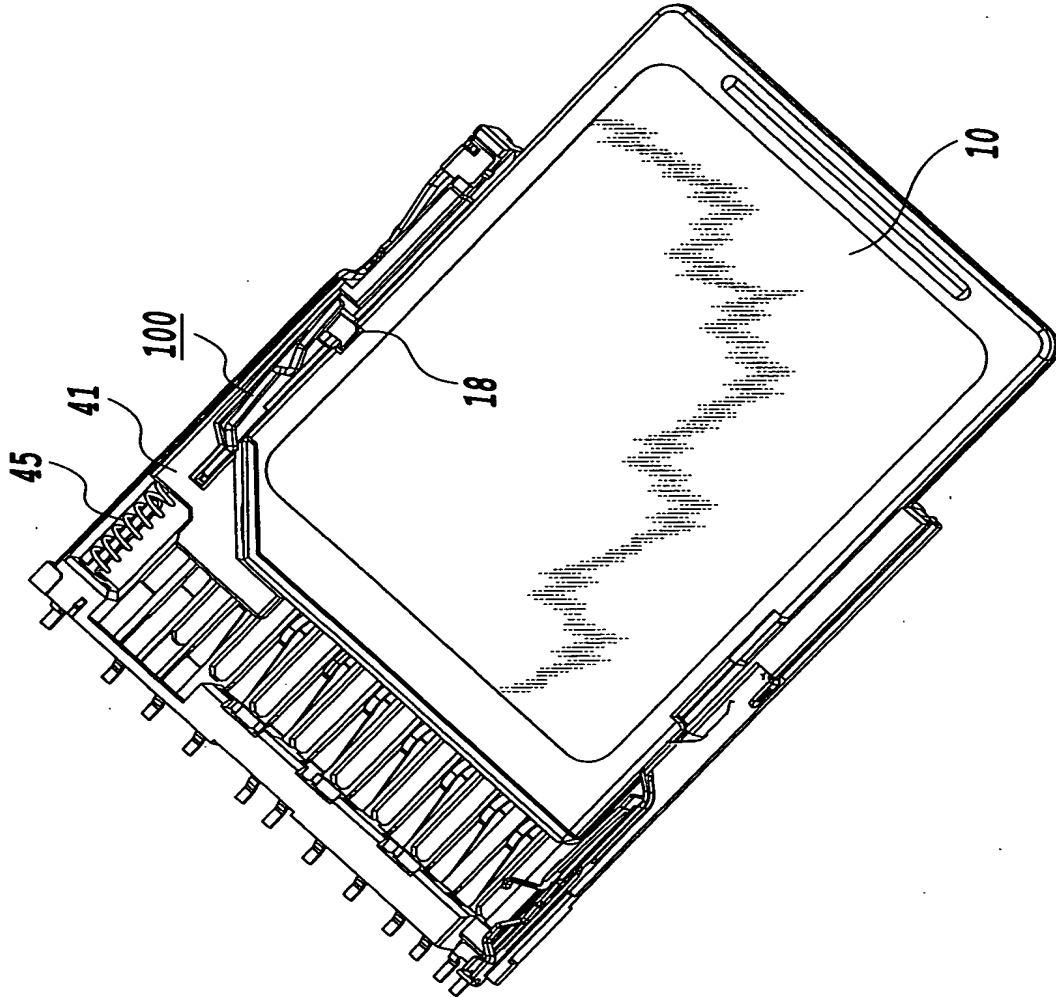


FIG. 36

37/39

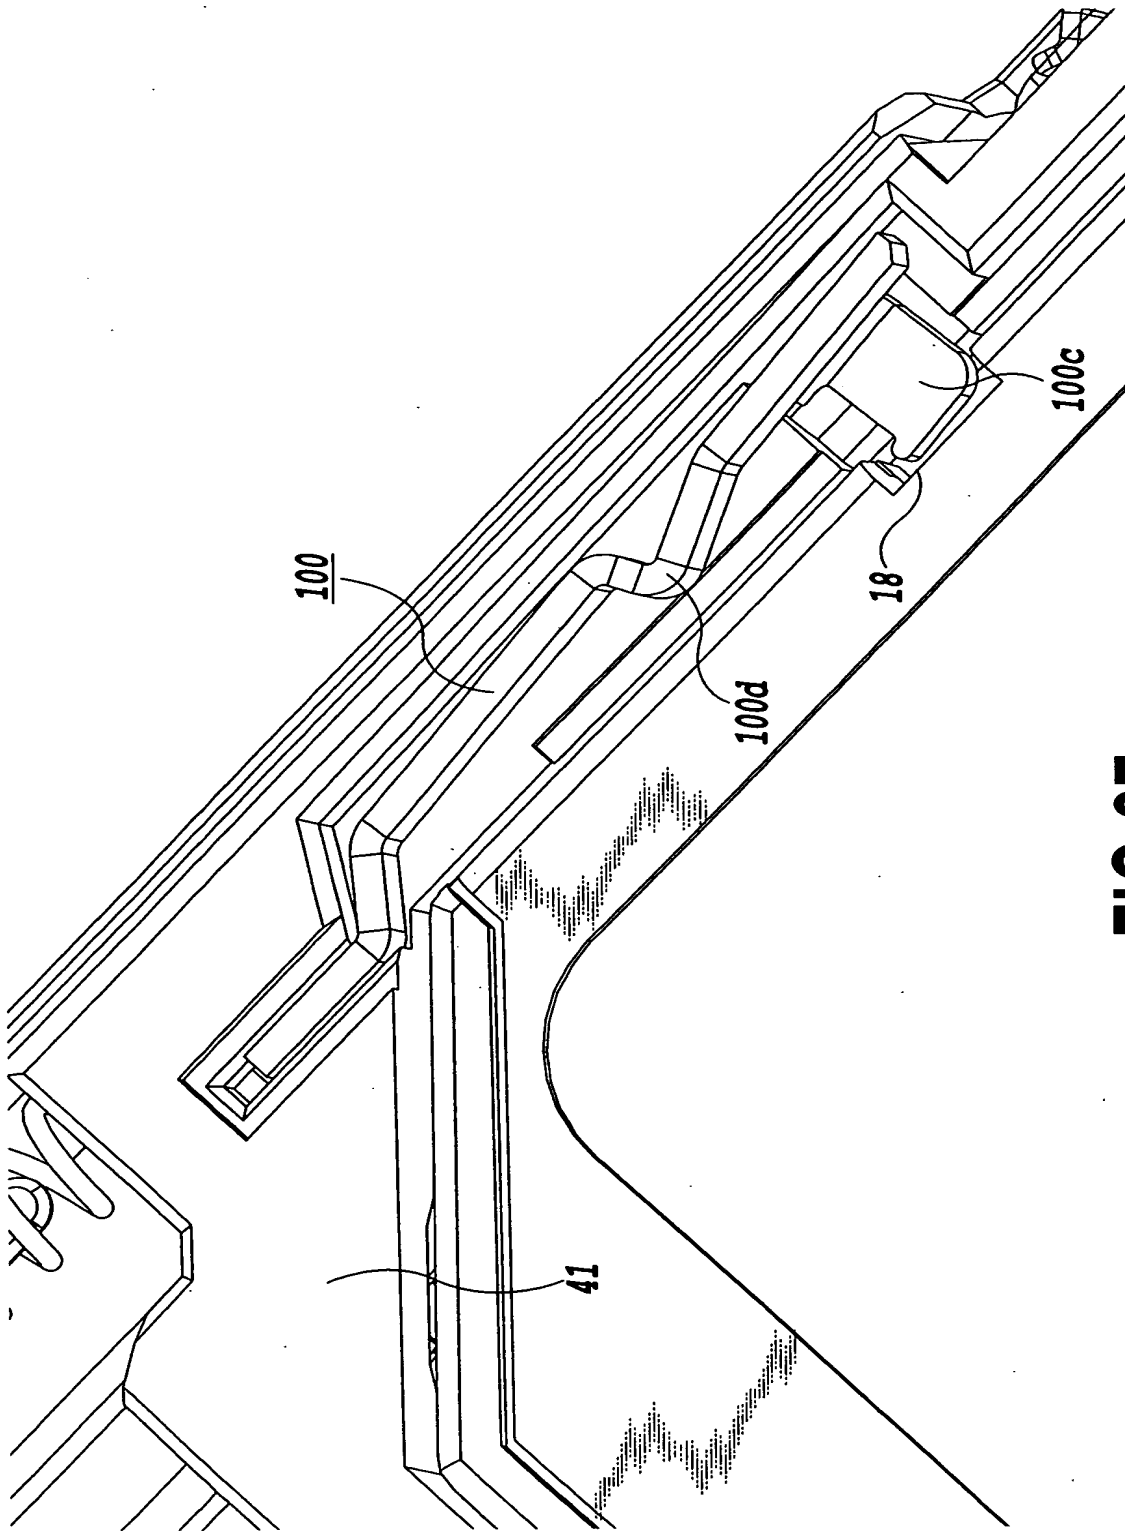


FIG. 37

38/39

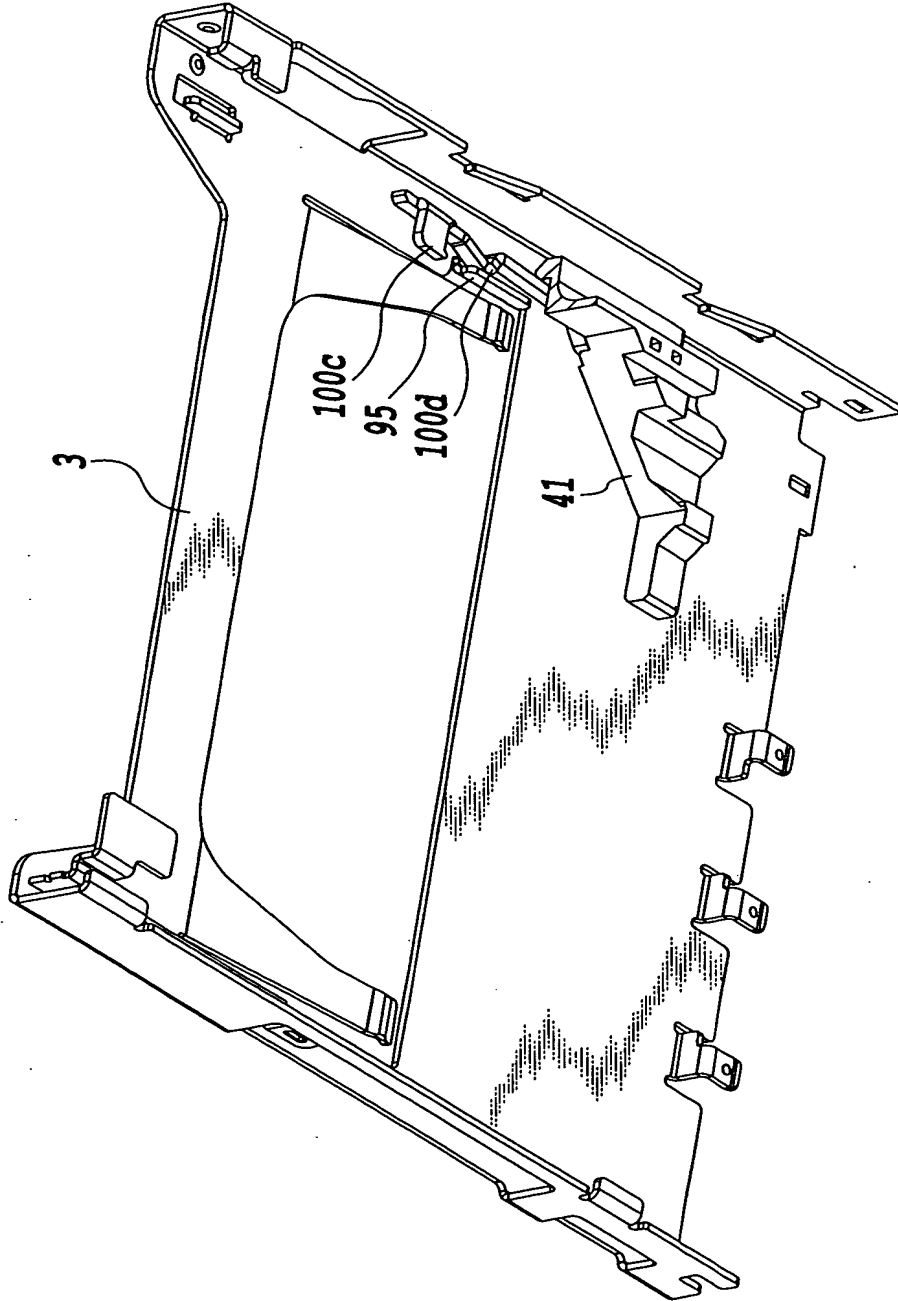


FIG.38

39/39

FIG.39

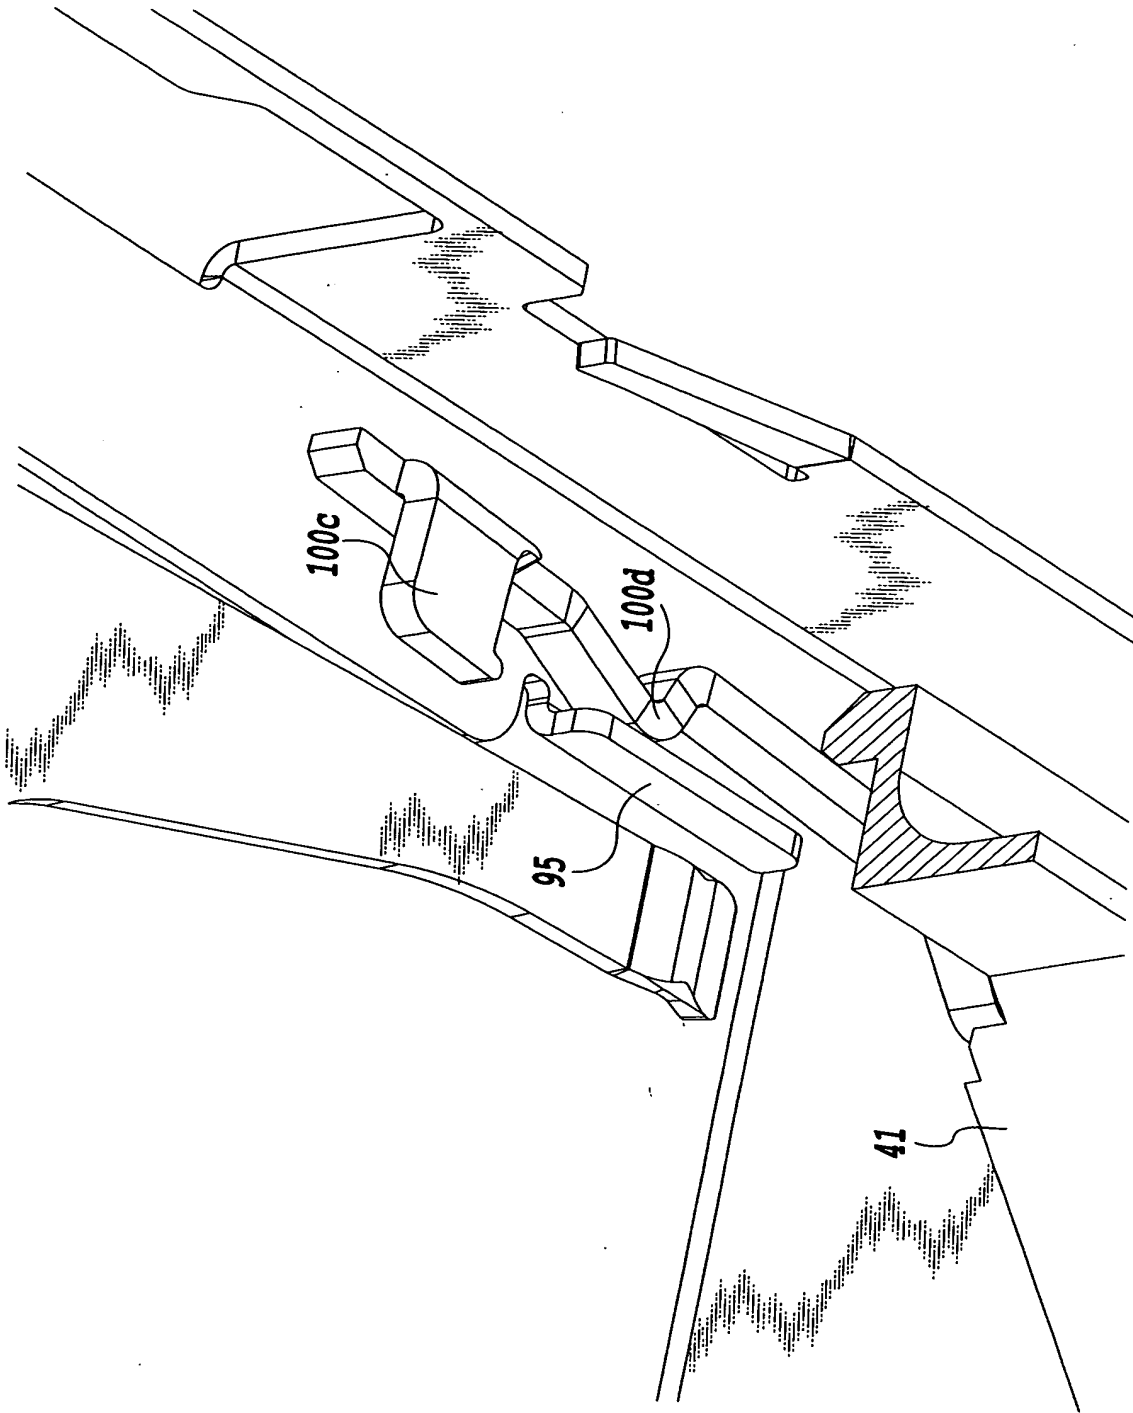


FIG. 39 is a perspective view of a mechanical assembly. The assembly consists of several components: a base member 41, a vertical support 95, and two angled members 100c and 100d. Member 100c is positioned above member 100d, and both are connected to the base 41. The assembly is shown in a perspective view, with dashed lines indicating hidden internal features. The components are labeled with reference numerals: 41 for the base, 95 for the vertical support, 100c for the upper angled member, and 100d for the lower angled member.